

DORRL ONE DEPARTURE (RNAV)

D-ATIS
133.675
CLNC DEL
135.35
CPDLC
GND CON
(Rwys 8L/8R, 12, 26L/26R)
121.8 348.6
(Rwys 9, 27, 30)
127.5 348.6
MIAMI TOWER
118.3 256.9
MIAMI DEP CON
119.45 290.325

**TOP ALTITUDE:
ASSIGNED BY ATC**

RNAV 1 - DME/DME/IRU or GPS.



RADAR required.

TAKEOFF MINIMUMS

Rwys 8L/R, 9, 12, 26L/R, 27, 30:

Standard with minimum climb of 500' per NM to 520.

NOTE: For turbo-props/props filed at or above 13000.

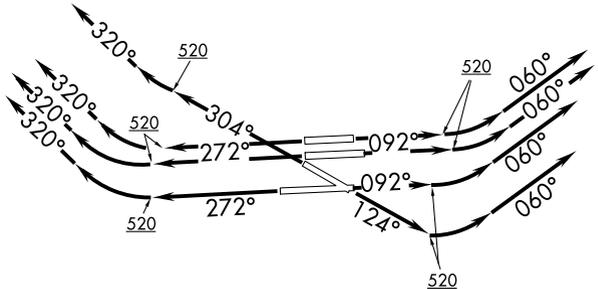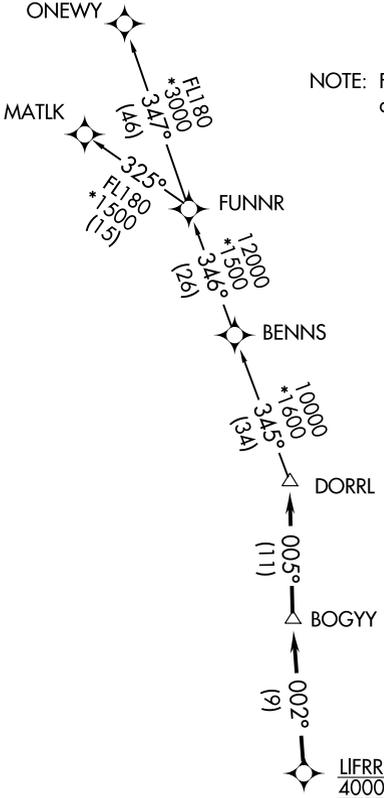

(NARRATIVE ON FOLLOWING PAGE)

NOTE: Chart not to scale.

SE-3, 22 FEB 2024 to 21 MAR 2024

SE-3, 22 FEB 2024 to 21 MAR 2024

DORRL ONE DEPARTURE (RNAV)

DORRL ONE DEPARTURE (RNAV)



DEPARTURE ROUTE DESCRIPTION SEE ADDITIONAL REQUIREMENTS ON AAUP

TAKEOFF RUNWAYS 8L/R, 9: Climb on heading 092° to 520, then climbing left turn heading 060° or as assigned by ATC for vectors to cross LIFRR at 4000, thence. . . .

TAKEOFF RUNWAY 12: Climb on heading 124° to 520, then climbing left turn heading 060° or as assigned by ATC for vectors to cross LIFRR at 4000, thence. . . .

TAKEOFF RUNWAYS 26L/R, 27: Climb on heading 272° to 520, then climbing right turn heading 320° or as assigned by ATC for vectors to cross LIFRR at 4000, thence. . . .

TAKEOFF RUNWAY 30: Climb on heading 304° to 520, then climbing right turn heading 320° or as assigned by ATC for vectors to cross LIFRR at 4000, thence. . . .

. . . .on track 002° to BOGY, then on track 005° to DORRL then on (transition), maintain altitude as assigned by ATC, expect filed altitude 10 minutes after departure.

MATLK TRANSITION (DORRL1.MATLK)

ONEWY TRANSITION (DORRL1.ONEWY)

SE-3, 22 FEB 2024 to 21 MAR 2024

SE-3, 22 FEB 2024 to 21 MAR 2024