

APP CRS

055°

Rwy Idg

6000

TDZE

670

Apt Elev

681

RNAV (GPS) RWY 6

MAURY COUNTY RGNL (MRC)


⚠

DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Nashville Intl altimeter setting; increase all MDA 120 feet and increase LNAV Cat B visibility ¼ SM, Cats C and D visibility ½ SM, increase Circling Cat C visibility ½ SM.

MISSED APPROACH:

Climb to 3000 direct URSAW and hold.

|                   |                                 |                          |
|-------------------|---------------------------------|--------------------------|
| AWOS-3<br>128.625 | MEMPHIS CENTER<br>125.85 379.25 | UNICOM<br>122.8 (CTAF) 0 |
|-------------------|---------------------------------|--------------------------|

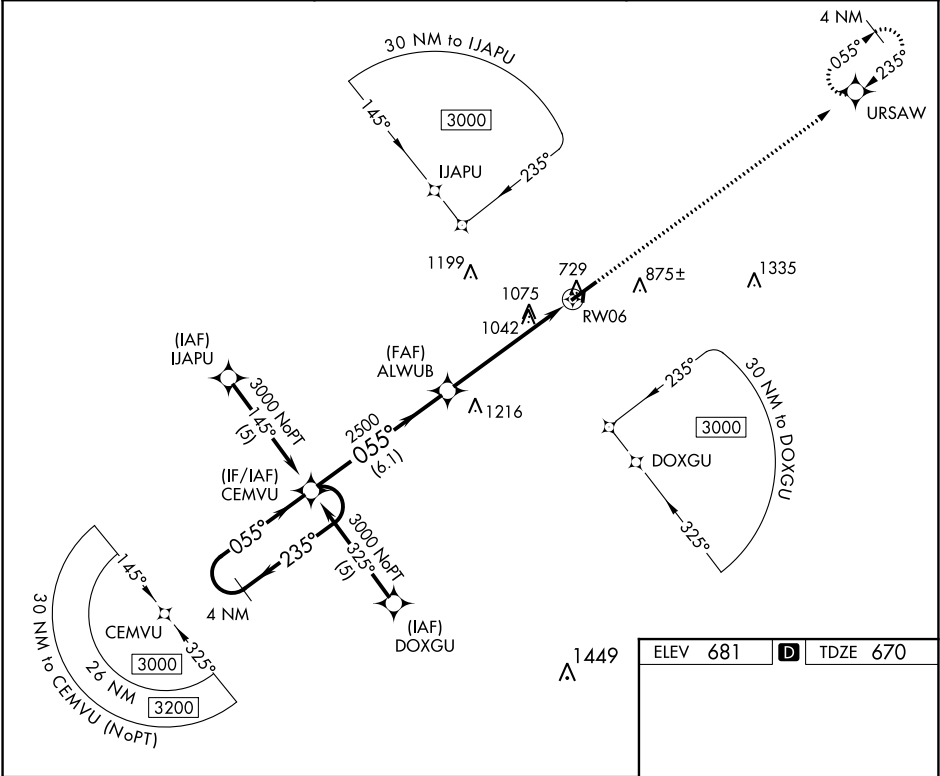

4 NM Holding Pattern

3000

235°

055°

CEMVU

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 42).

3000

URSAW

ALWUB

2500

055°

3.05° TCH 40

6.1 NM

5.6 NM

RW06

ELEV 681

TDZE 670

055°

8000 x 100

0.5% UP

0.4% UP

35

1841 x 65

| CATEGORY | A                     | B                     | C                       | D                      |
|----------|-----------------------|-----------------------|-------------------------|------------------------|
| LNAV MDA | 1340-1                | 670 (700-1)           | 1340-1¾<br>670 (700-1¾) | 1340-2<br>670 (700-2)  |
| CIRCLING | 1340-1<br>659 (700-1) | 1360-1<br>679 (700-1) | 1380-2<br>699 (700-2)   | 1620-3<br>939 (1000-3) |

MIRL Rwy 6-24

REIL Rwy 6

REIL Rwy 24 0