


APP CRS	Rwy Idg	9800
106°	TDZE	4
	Apt Elev	4

RNAV (RNP) Z RWY 11

LOUIS ARMSTRONG NEW ORLEANS INTL (MSY)

RNP AR APCH - GPS.			ALSF-2		MISSED APPROACH: Climb to 2000 on track 106° to ZUBEL and on track 195° to SAFES and hold.	
▼ For uncompensated Baro-VNAV systems, procedure NA below -1°C or above 54°C. For inop ALS, increase RNP 0.30 all Cats visibility to RVR 5500.						
D-ATIS 127.55	NEW ORLEANS APP CON WEST 125.5 350.35 EAST 133.15 290.3	NEW ORLEANS TOWER 119.5 254.3	GND CON 121.9 273.525	CLNC DEL 120.925	CPDLC	

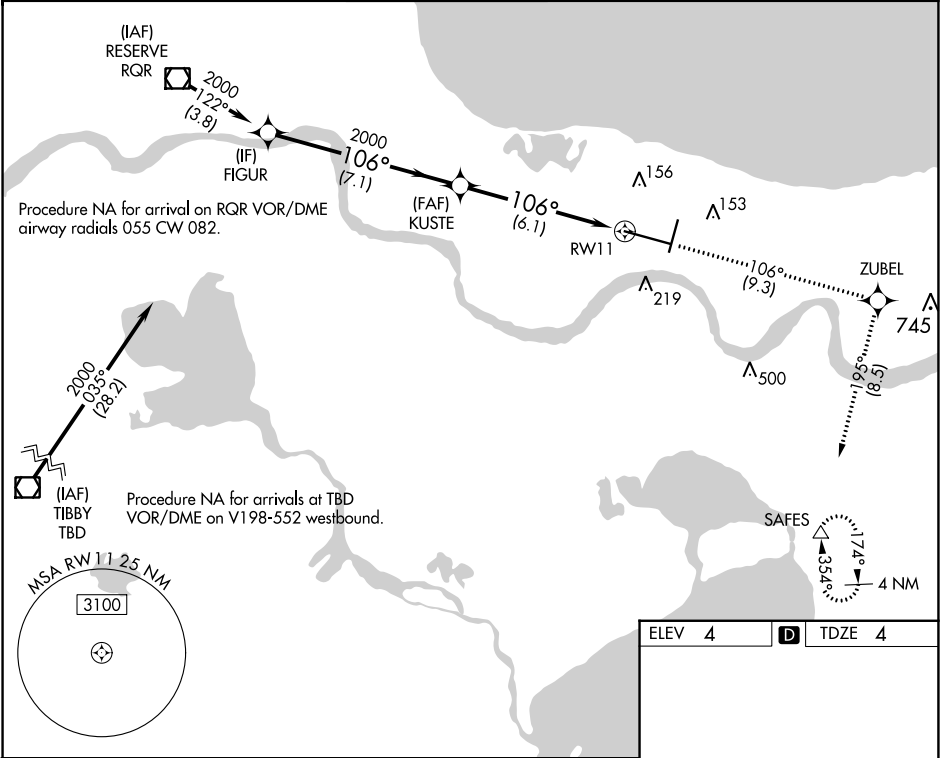

		2000 ↑	tr 106°	ZUBEL ✦	tr 195°	SAFES △
FIGUR		2000 106° 2000 2000 RW11				
GP 3.00° TCH 55		7.1 NM 6.1 NM				
CATEGORY	A	B	C	D		
RNP 0.30 DA	367/35 363 (400-5%)					
AUTHORIZATION REQUIRED						
RLS Rwy 2 TDZ/CL Rwy 11 HIRL All Runways						