

WAAS CH 45927 W28A	APP CRS 279°	Rwy Idg 6009 TDZE 22 Apt Elev 38
--	------------------------	---

RNAV (GPS) RWY 28


NOME (OME)(PAOM)

Inoperative table does not apply to LPV 28 all Cats. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). Circling NA for Cats C and D north of Rwy 10-28. DME/DME RNP-0.3 NA. Helicopter visibility reduction below 4000 NA. Night landing: Rwy 21 NA.

MALSR

MISSED APPROACH: Climb to 3700 direct SPYVY and hold, continue climb-in-hold to 3700.

AFS 119.925	ANCHORAGE CENTER 133.3 290.4	NOME RADIO 123.6 (CTAF) 0
-----------------------	--	-------------------------------------

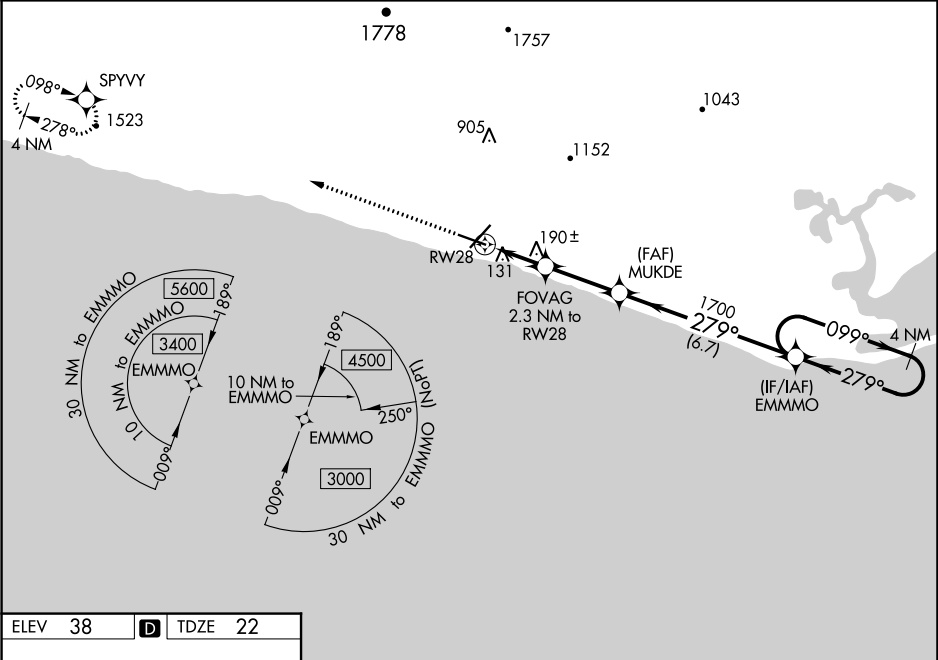

ELEV 38

D

TDZE 22

REIL Rwy 3 and 10

HIRL Rwy 10-28

MIRL Rwy 3-21

3700 SPYVY

*LNAV only.

FOVAG 2.3 NM to RW28

MUKDE 1700

EMMMO 4 NM Holding Pattern

GP 3.00° TCH 51

CATEGORY	A	B	C	D
LPV DA	272/40 250 (300-¾)			
LNAV/VNAV DA	298/40 276 (300-¾)			
LNAV MDA	440/40 418 (500-¾)			
CIRCLING	540-1 502 (600-1)	540-1½ 502 (600-1½)	700-2 662 (700-2)	