

22195

LOC/DME I-OLX <u>111.55</u> Chan 52 (Y)	APP CRS 128°	Rwy Idg 6000 TDZE 8 Apt Elev 8
---	------------------------	---

ILS or LOC RWY 12
MIAMI-OPA LOCKA EXEC(OPF)

V Inop table does not apply to S-ILS 12. Helicopter visibility reduction
A below $\frac{3}{4}$ SM NA. VDP NA with Miami Intl altimeter setting.
When local altimeter setting not received, use Miami Intl altimeter
setting and increase all DA/MDA 20 feet and Circling Cat D visibility
 $\frac{1}{4}$ SM. For inop MALSR, increase S-LOC 12 Cats A and B visibility
to 1 mile and Cats C and D visibility to $\frac{1}{2}$ miles.

MALSR





MISSED APPROACH: Climb to 800 then climbing left turn to 2000 on heading 090° and DHP VORTAC R-069 to JANUS INT/DHP 42.5 DME and hold.


ATIS 125.9	MIAMI APP CON 128.6 306.975	OPA LOCKA TOWER ★ 134.675 (CTAF) 0	GND CON 120.025	CLNC DEL 119.2	GCO 119.45
---------------	--------------------------------	---------------------------------------	--------------------	-------------------	---------------

RADAR REQUIRED

MISSED APCH FIX

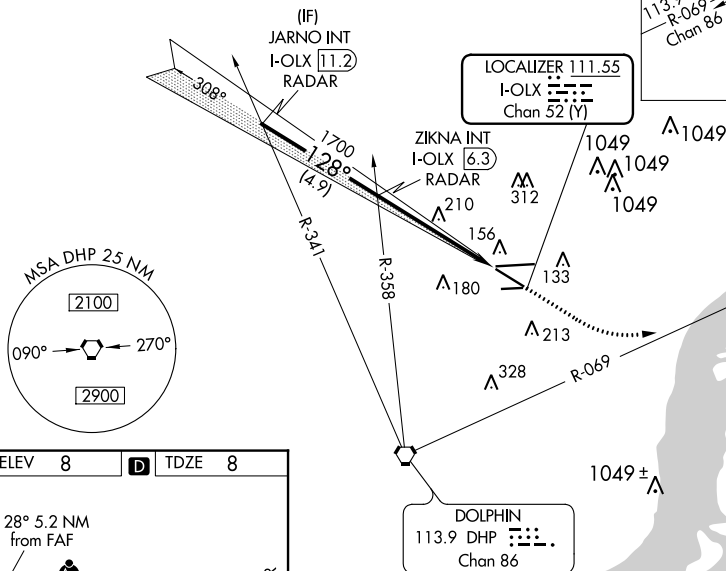

ELEV	8	D	TDZE	8
------	---	----------	------	---



MIRL Rwy 9R-27L	
HIRL Rwy 9L-27R and 12-30	L
FAF to MAP 5.2 NM	

Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44

JARNO INT I-OLX [11.2] RADAR	ZIKNA INT I-OLX [6.3] RADAR	800 ↑	2000 hdg 090° 	DHP R-069 	JANUS
*LOC only.					
CATEGORY	A	B	C	D	
S-ILS 12	208- ³ / ₄ 200 (200- ³ / ₄)				
S-LOC 12	520- ³ / ₄ 512 (600- ³ / ₄)		520-1 512 (600-1)		
CIRCLING	540-1 532 (600-1)		620- ¹ / ₄ 612 (700- ¹ / ₄)		740- ² / ₄ 732 (800- ² / ₄)

MIAMI, FLORIDA
Amdt 2C 02DEC21

25°54'N-80°17'W

MIAMI-OPA LOCKA EXEC (OPF)
ILS or LOC RWY 12

SE-3, 22 FEB 2024 to 21 MAR 2024

SE-3, 22 FEB 2024 to 21 MAR 2024