



WAAS CH 93839 W28E	APP CRS 275°	Rwy Idg TDZE 667 Apt Elev 680
--	------------------------	---

RNAV (GPS) Y RWY 28L
CHICAGO O'HARE INTL (ORD)

RNP APCH		ALSF-2		MISSED APPROACH: Climb to 1200 then climbing left turn to 4000 direct CGT VORTAC and hold.	
Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Use of FD or AP required during simultaneous operations.					
D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292.125	O'HARE TOWER 133.0 348.0	GND CON 124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRs)	(TWR CENTER) 121.75 (OBND) 121.9 (IBND)	CLNC DEL 121.6 CPDLC

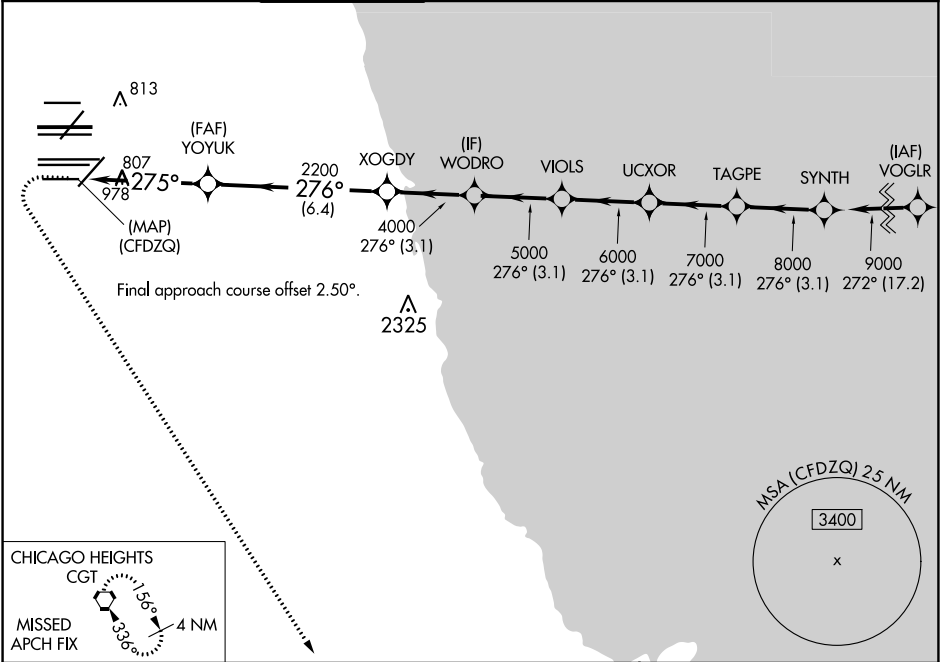

1200 ↑		4000 ↘		CGT 		SYNTH			
* LNAV only						TAGPE 9000			
* 1.1 NM to (CFDZQ)						UCXOR 7000			
YOYUK 2200						VIOLS 6000			
XOGDY 4000						WODRO 5000			
2200						GP 3.00° TCH 55			
1.1		3.6 NM		6.4 NM		3.1 NM		3.1 NM	
CATEGORY		A		B		C		D	
LPV DA		917/24		250 (300-½)					
LNAV/ VNAV DA		1090/40		423 (500-¾)					
LNAV MDA		1060/24		393 (400-½)		1060/35		393 (400-⅝)	

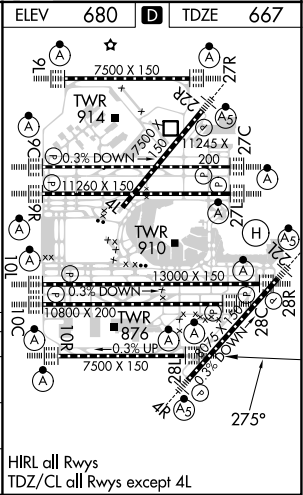

EC-3, 22 FEB 2024 to 21 MAR 2024

EC-3, 22 FEB 2024 to 21 MAR 2024