

VORTAC OSH 116.75 Chan 114 (Y)	APP CRS 360°	Rwy Idg 8002 TDZE 808 Apt Elev 808
--	------------------------	---



VOR RWY 36
WITTMAN RGNL (OSH)

⚠ Circling to Rwy 5, 23, and 31 NA at night. When local altimeter setting not received, use Fond Du Lac altimeter setting and increase all MDA 40 feet; increase S-36 Cats C/D visibility and, Circling Cat C visibility $\frac{1}{8}$ mile, increase Circling Cat D visibility $\frac{1}{4}$ mile, LAUDE fix minimums increase S-36 Cats C/D visibility to RVR 5500 and Circling Cat D visibility to $2\frac{1}{4}$ mile. For inop MALSR, when using Fond Du Lac altimeter setting, increase LAUDE fix minimums S-36 Cats C/D visibility to $1\frac{3}{8}$ mile. VDP NA with Fond Du Lac altimeter setting.

MALSR

MISSED APPROACH:
Climbing right turn to 3000 on OSH VORTAC R-111 to LEWKO INT/ OSH 15.1 DME and hold.

ATIS 125.9	MILWAUKEE APP CON 127.0 263.075	OSHKOSH TOWER ★ 118.5 (CTAF) 290.9	GND CON 132.3	UNICOM 122.95
----------------------	---	--	-------------------------	-------------------------

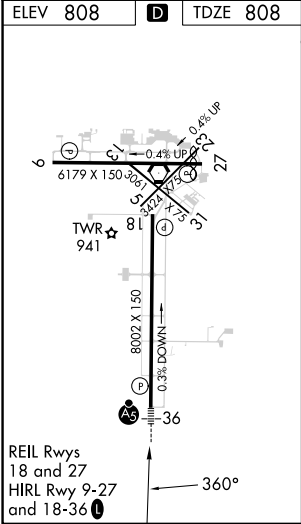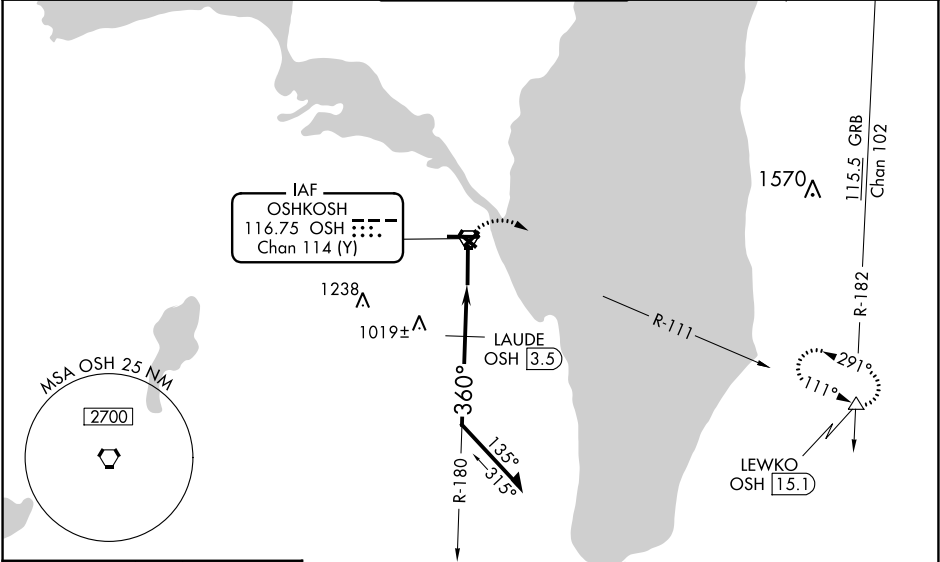

3000		LEWKO		OSH VORTAC		Remain within 10 NM	
OSH R-111		△		6000		2300	
*1500 when using Fond Du Lac altimeter setting.				OSH 2.9		LAUDE OSH 3.5	
		2.97° TCH 52		360°		*1460	
		1.3 NM		0.6 NM			
CATEGORY	A		B		C		D
S-36	1460/24		652 (700-½)		1460-1⅜		652 (700-1⅜)
CIRCLING	1460-1		652 (700-1)		1460-1⅞		1460-2
					652 (700-1⅞)		652 (700-2)
LAUDE FIX MINIMUMS							
S-36	1280/24		472 (500-½)		1280/50		472 (500-1)
CIRCLING	1280-1		1300-1		1360-1½		1440-2
	472 (500-1)		492 (500-1)		552 (600-1½)		632 (700-2)