WAAS CH 40012 W16A	APP CRS 165°	Rwy Idg 10518 TDZE 100 Apt Elev 100

RNAV (GPS) RWY 16

PORTSMOUTH INTL AT PEASE (PSM)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Circling NA east of Rwy 16-34. For inop ALS, increase LPV Cat E visibility to RVR 4500; increase LNAV/VNAV all Cats visibility to RVR 4500; increase LNAV Cat C/D/E visibility to RVR 5500. * RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using Rochester altimeter setting).

MALSR (A5)

MISSED APPROACH: Climb to 3000 direct TTATT and track 165° to IDEED and hold, continue climb-in-hold to 3000.

ATIS	BOSTON APP CON	PORTSMOUTH TOWER	GND CON	CLNC DEL
132.05 273.5	125.05 269.4	128.4 269.0	120.95 275.8	335.8

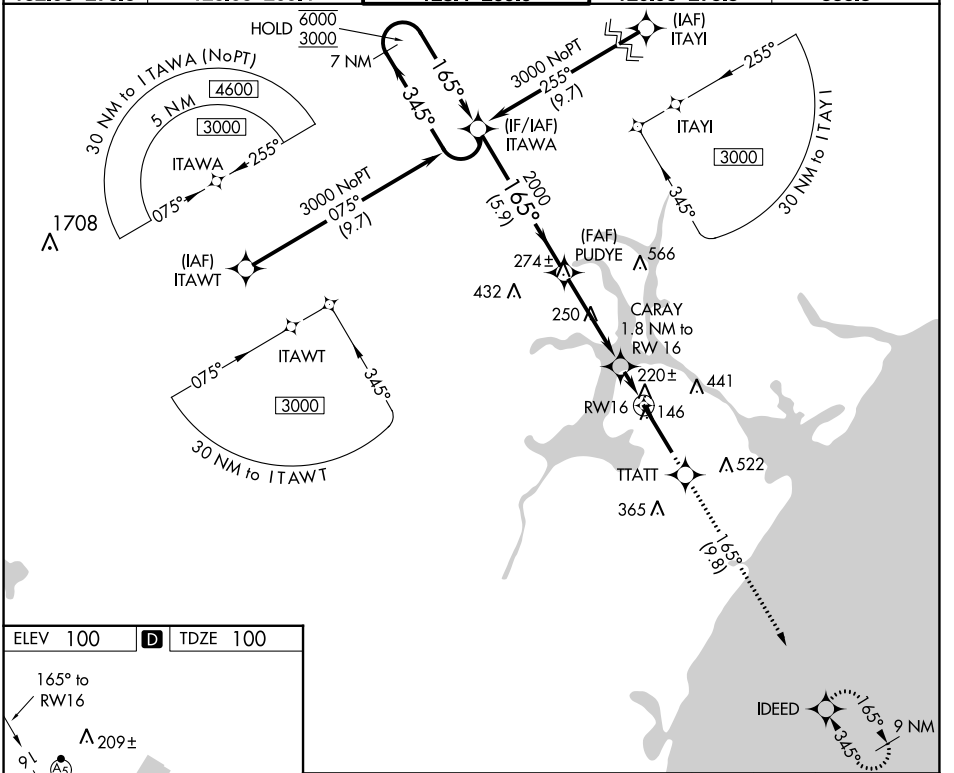

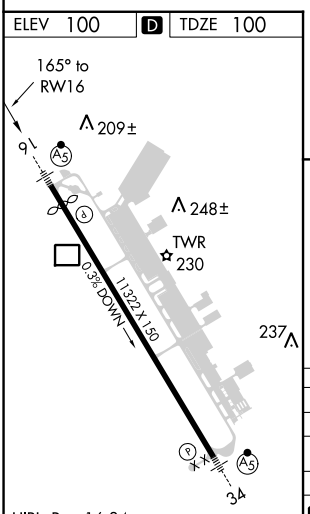

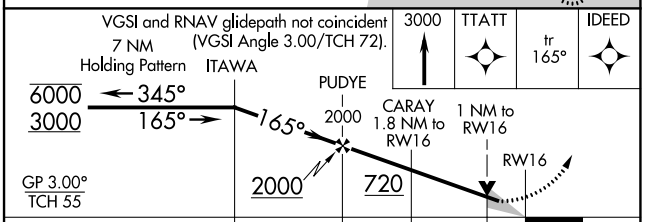

CATEGORY	A	B	C	D	E
LPV DA*	300/24 200 (200-½)				
LNAV/VNAV DA	397/24 297 (300-½)				
LNAV MDA	480/24 380 (400-½)		480/35 380 (400-⅝)		
C CIRCLING	500-1 400 (400-1)	560-1 460 (500-1)	680-1½ 580 (600-1½)	780-2¼ 680 (700-2¼)	800-2½ 700 (700-2½)

NE-1, 22 FEB 2024 to 21 MAR 2024
NE-1, 22 FEB 2024 to 21 MAR 2024