

VORTAC HPW	APP CRS	Rwy Idg	5002
114.35	252°	TDZE	191
Chan 90 (Y)		Apt Elev	193


VOR RWY 23

TRI CITIES EXEC/DINWIDDIE COUNTY (PTB)

When local altimeter setting not received, use Richmond Exec/Chesterfield County altimeter setting and increase all MDA 40 feet; increase S-23 Cat C and Circling Cat C visibility 1/8 mile and YETUB fix minimums S-23 Cat C visibility 1/8 mile and Circling Cat C visibility 1/4 mile. DME required.

MISSED APPROACH: Climb to 2000 on heading 214° and HPW R-244 to FASOS/HPW 30.8 DME and hold.

AWOS-3	POTOMAC APP CON	GCO	UNICOM
133.325	126.75 307.2	135.075	122.7 (CTAF) 0

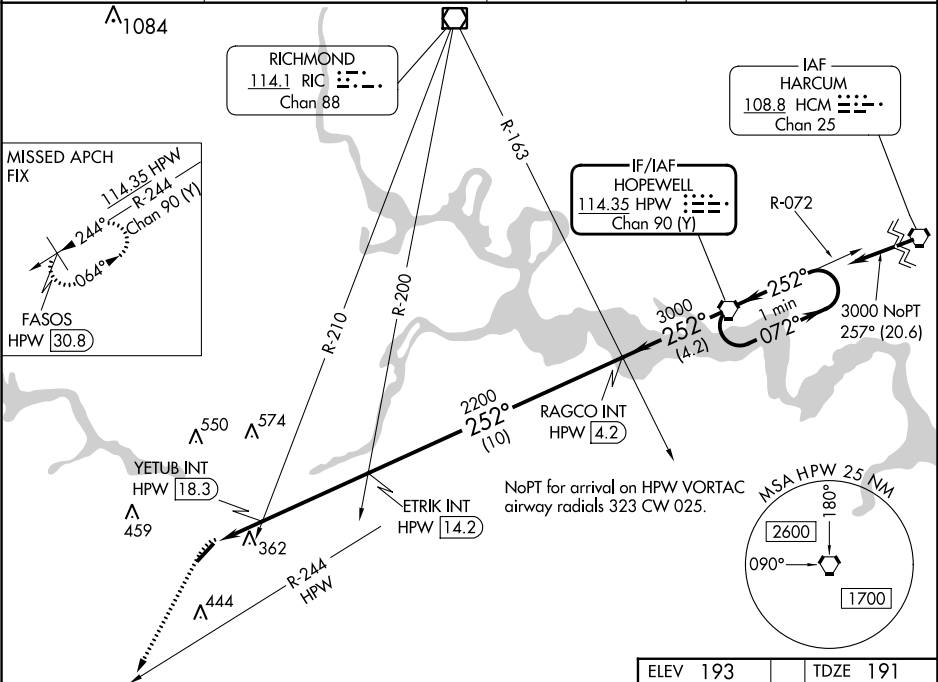

2000

hdg 214°

HPW R-244

FASOS HPW 30.8

*780 when using Richmond Executive-Chesterfield County altimeter setting.

One Minute Holding Pattern

YETUB INT HPW 18.3

ETRIK INT HPW 14.2

RAGCO INT HPW 4.2

HPW VORTAC

3.06°

TCH 40

2200

252°

3000

072°

3000

CATEGORY	A	B	C	D
S-23	740-1	549 (600-1)	740-1 5/8 549 (600-1 5/8)	NA
CIRCLING	740-1	547 (600-1)	760-1 5/8 567 (600-1 5/8)	NA
YETUB FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)				
S-23	620-1	429 (500-1)	620-1 1/4 429 (500-1 1/4)	NA
CIRCLING	680-1	487 (500-1)	760-1 1/2 567 (600-1 1/2)	NA

ELEV 193

TDZE 191

252°

500 X 100

5

2

1

0

MIRL Rwy 5-23 0

REIL Rwy 23 0

FAF to MAP 6.1 NM

Knots	60	90	120	150	180
Min:Sec	6:06	4:04	3:03	2:26	2:02