

WAAS
CH **93801**
W18A

APP CRS
182°

Rwy Idg
TDZE **1908**
Apt Elev **1919**

RNAV (GPS) RWY 18

SAN ANGELO RGNL/MATHIS FLD (SJT)

RNP APCH - GPS.


▼

ASR

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C.
Circling NA for Cat E west of Rwy 18-36.

MISSED APPROACH: Climb to 4400 direct HUMUG and on track 232° to HEXPE and hold.

ATIS 128.45 319.0	SAN ANGELO APP CON ★ 125.35 354.1	MATHIS TOWER ★ 118.3(CTAF) 284.7	GND CON 121.9 348.6	UNICOM 122.95
-----------------------------	---	--	-------------------------------	-------------------------

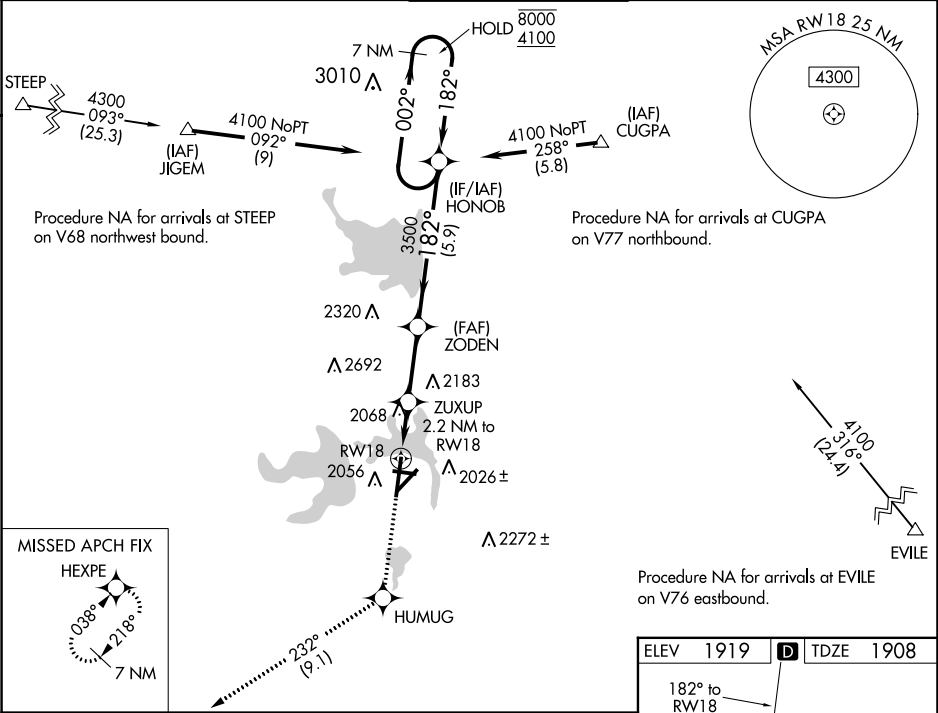

4400	HUMUG	tr 232°	HEXPE	HONOB	7 NM Holding Pattern
*LNAV only	ZUXUP 2.2 NM to RW18	ZODEN	3500	182°	8000 4100
	*1.2 NM to RW18		*2640	3500	GP 3.00° TCH 45
	1.2 NM	1 NM	2.7 NM	5.9 NM	
CATEGORY	A	B	C	D	E
LPV DA	2158-3/4 250 (300-3/4)				
LNAV/VNAV DA	2246-1 338 (400-1)				
LNAV MDA	2340-1	432 (500-1)	2340-1 1/8 432 (500-1 1/8)		
CIRCLING	2360-1 441 (500-1)	2380-1 461 (500-1)	2500-1 1/2 581 (600-1 1/2)	2700-2 1/2 781 (800-2 1/2)	2700-2 3/4 781 (800-2 3/4)

