

SAN ANTONIO, TEXAS

RNAV (GPS) RWY 34

WAAS CH 65364 W34A	APCH CRS 338°	Rwy Idg 11,550 TDZE 660 Arpt Elev 690
---------------------------------	------------------	--

AL-371 (USAF)

KELLY FLD (KSKF)

RNP APCH

T * When ALS inop, increase RVR to 40, vis to 3/4 miles.
** When ALS inop, increase vis to 1 3/8 miles.

ALSF-1

MISSED APPROACH: Climb to 3000 direct MONST. Expect ATC instructions.

ATIS 120.45 273.5	SAN ANTONIO APP CON 118.05 353.5	KELLY TOWER 124.3 322.35	GND CON 121.8 289.4
----------------------	-------------------------------------	-----------------------------	------------------------


1542

MONST

*** When ALS inop, increase CAT
AB RVR to 55, vis to 1 mile;
CAT CDE vis to 1 3/8 miles.

**** Circling NA E of Rwy 16-34.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (3°F) or above 54°C (129°F).

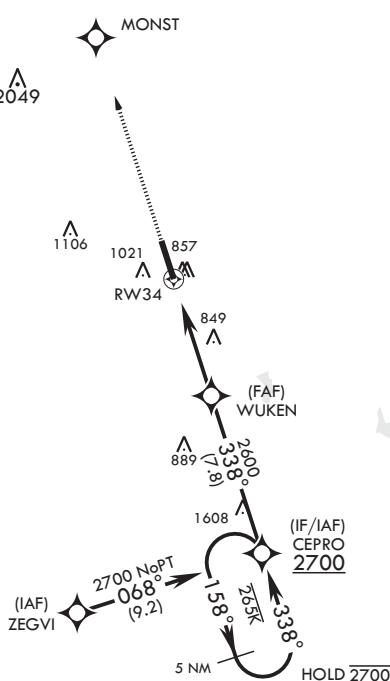

MSA RV34 25 NM

4200


EMERG SAFE ALT 100 NM 4200

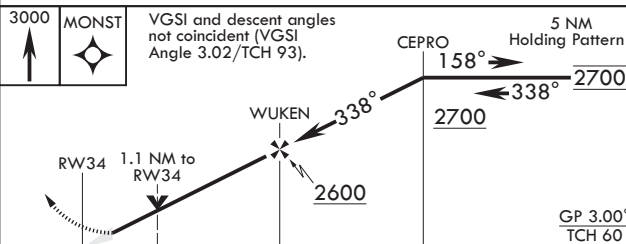

ELEV 690

TDZE 660

CATEGORY	A	B	C	D	E
LPV DA*	860/24		200	(200-½)	
LNAV/VNAV DA**	1120/45		460	(500-¾)	
LNAV MDA***	1120/24	460 (500-½)	1120/45	460	(500-¾)
 CIRCLING****	1200-1 510 (600-1)	1280-1 590 (600-1)	1340-1½ 650 (700-1½)	1400-2¼ 710 (800-2¼)	1900-3 1210 (1300-3)

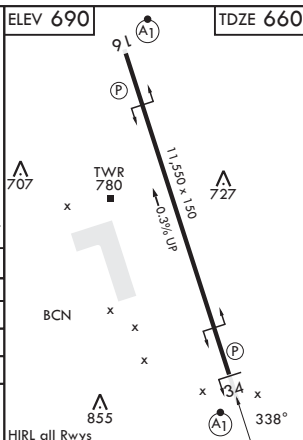

SAN ANTONIO, TEXAS

29°23'N - 98°35'W

KELLY FLD (KSKF)

RNAV (GPS) RWY 34

Amdt 2 23FEB23

SC-3, 22 FEB 2024 to 21 MAR 2024