

LOC I-SLN	APP CRS	Rwy Idg	12300
108.9	353°	TDZE	1271
		Apt Elev	1288


ILS or LOC RWY 35
SALINA RGNL (SLN)

⚠ For inop ALS, increase S-LOC 35 Cat D visibility to 1 1/4 SM and Cat E visibility to 1 1/2 SM. For inop ALS, increase S-ILS 35 Cat E visibility to 3/4 SM. Circling NA for Cats D and E southwest of Rwy 12-30.


MALSR

MISSED APPROACH: Climb to 1700 then climb to 3000 direct SLN VORTAC and hold.

ATIS 120.15	KANSAS CITY CENTER 134.9 363.2	SALINA TOWER ★ 119.3 (CTAF) 0 257.7	GND CON 121.9 360.8	UNICOM 122.95
----------------	-----------------------------------	--	------------------------	------------------

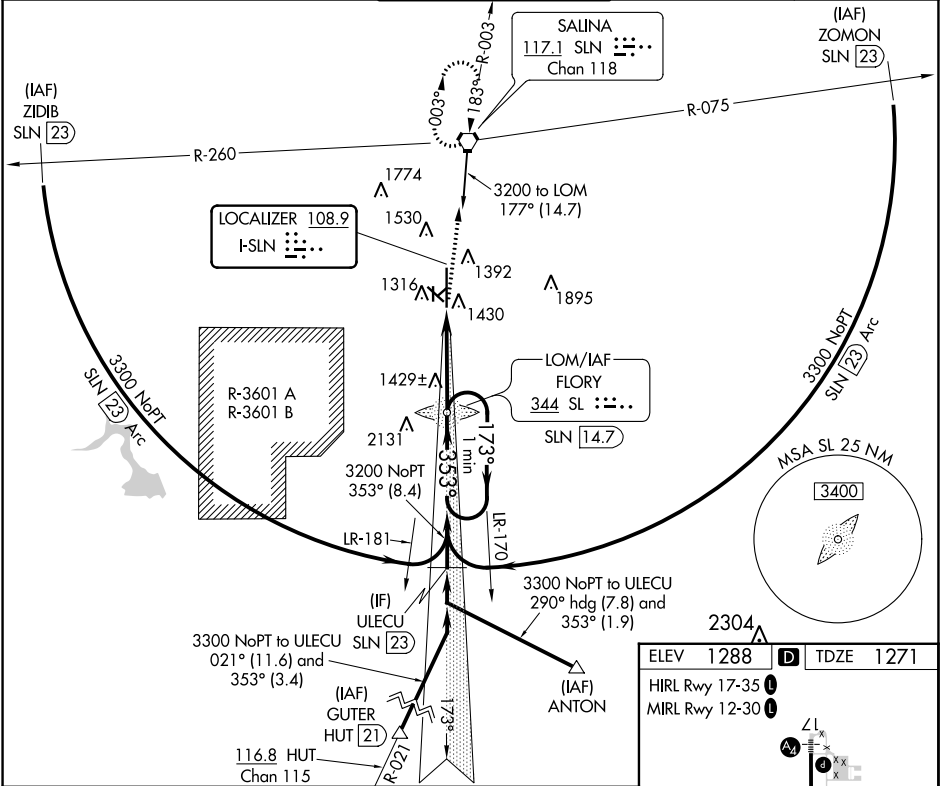

1700	3000	SLN	SL LOM SLN 14.7 3166 One Minute Holding Pattern 173° 353° 3200 GS 3.00° TCH 48 5.7 NM				
CATEGORY	A	B	C	D	E		
S-ILS 35	1471-½ 200 (200-½)						
S-LOC 35	1680-½ 409 (400-½)						
CIRCLING	1820-1 532 (600-1)	1840-1 552 (600-1)	1860-1½ 572 (600-1½)	1860-2 572 (600-2)	1920-2¼ 632 (700-2¼)		

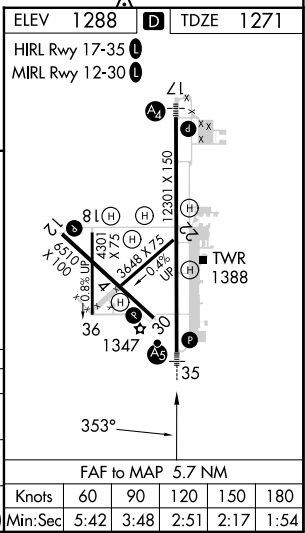

ILS or LOC RWY 35
SALINA RGNL (SLN)