


VOR OLK 110.4	APP CRS 114°	Rwy Idg TDZE Apt Elev	2623 836 836
-------------------------	------------------------	-----------------------------	---

VOR RWY 13
SMITH FLD (SMD)

NA -22°C Rwy 13 helicopter visibility reduction below 1 SM NA. Procedure NA at night. When local altimeter setting not received, use Fort Wayne Intl altimeter setting and increase all MDA 40 feet and S-13 Cat C visibility 1/8 SM. MISSED APPROACH: Climb to 1900 then climbing left turn to 2700 direct OLK VOR and hold.

AWOS-3 124.55	FORT WAYNE APP CON 127.2 284.6	UNICOM 122.8 (CTAF) 0
-------------------------	--	---------------------------------

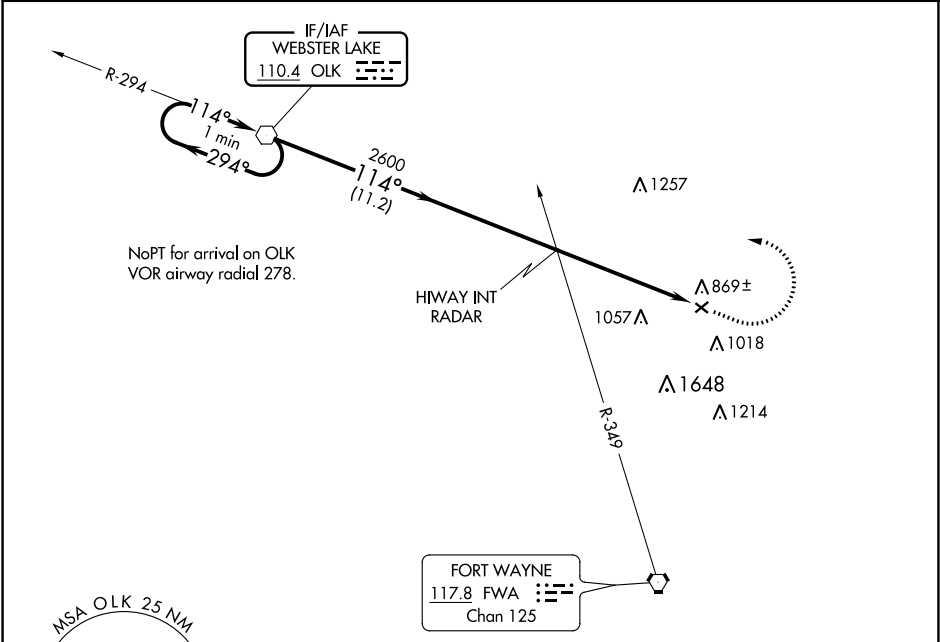

One Minute Holding Pattern		OLK VOR		1900		2700		OLK	
2700		294°		114°		114°		3.00°	
2600		2600		3.00°		TCH 40		11.2 NM	
CATEGORY		A		B		C		D	
S-13		1360-1		524 (600-1)		1360-1½		524 (600-1½)	
CIRCLING		1400-1		564 (600-1)		1940-3		1104 (1200-3)	
ELEV 836		TDZE 836		114°		3126 X 100		2922 X 60	
MIRL Rwy 5-23 and 13-31 0		FAF to MAP 5.4 NM		Knots		60		90	
				Min:Sec		5:24		3:36	