
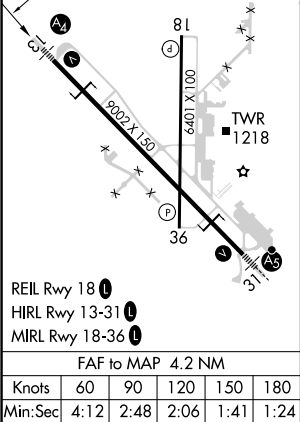


LOC I- OIQ 111.3	APP CRS 133°	Rwy Idg 9002 TDZE 1095 Apt Elev 1098
-----------------------------------	------------------------	---

ILS or LOC RWY 13

SIoux GATEWAY/BRIG GENERAL BUD DAY FLD (SUX)

ADF required. ADF or RADAR required for procedure entry.		MALS	MISSED APPROACH: Climb to 2000 then climbing right turn to 3100 direct TOMMI LOM/SUX 9.3 DME and hold, continue climb-in-hold to 3100	
For inop ALS, increase S-LOC 13 Cat E visibility to 1½ SM. Inop table does not apply to S-ILS 13.				
ATIS 119.45 270.8	SIoux CITY APP CON ★ 124.6 307.0	SIoux CITY TOWER ★ 118.7 (CTAF) 0 254.3	GND CON 121.9 348.6	UNICOM 122.95

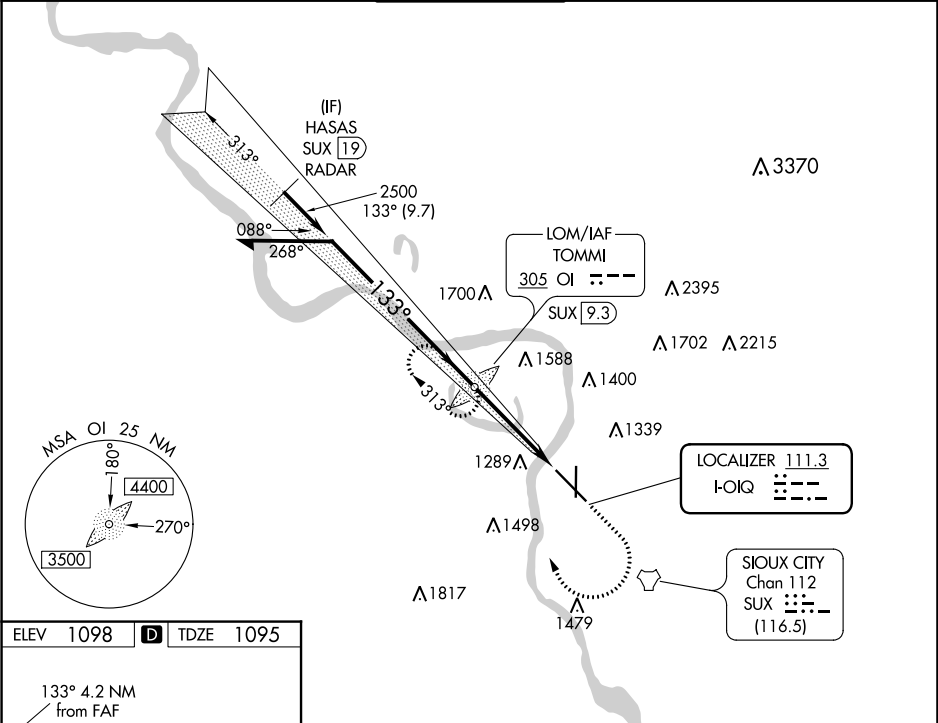

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 50).		OI LOM TOMMI SUX 9.3		2000	3100	OI
Remain within 15 NM		3100		2497		*LOC only
GS 3.00° TCH 54		2500		*SUX 6.4		SUX 5.1
				2.9 NM		1.3 NM
CATEGORY	A	B	C	D	E	
S-ILS 13	1295/40 200 (200-¾)					
S-LOC 13	1560/40 465 (500-¾)		1560/60 465 (500-1¼)			
CIRCLING	1640-1 542 (600-1)	1700-1 602 (700-1)	1700-1¾ 602 (700-1¾)	1860-2½ 762 (800-2½)	1940-3 842 (900-3)	