RNAV (GPS) RWY 18

BOMAR FLD/SHELBYVILLE MUNI (SYI)

WAAS	APP CRS	Rwy Idg	5504
CH 50407	180°	TDZE	800
W18A		Apt Elev	801

When local altimeter setting not received, use Tullahoma altimeter setting and increase LPV DA to 1123, LNAV/VNAV DA to 1389, all MDA 80 feet, increase LPV all Cats visibility ½ SM, LNAV/VNAV all Cats visibility ¼ SM and LNAV Cat C and D visibility ¼ SM. Baro-VNAV NA when using Tullahoma altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116° F). DME/DME RNP-0.3 NA. VDP NA when using Tullahoma altimeter setting.

MISSED APPROACH: Climb to 3000 direct UCELI and hold.

AWOS-3	MEMPHIS CENTER	UNICOM
119.275	128.15 323.125	122.8 (CTAF) L

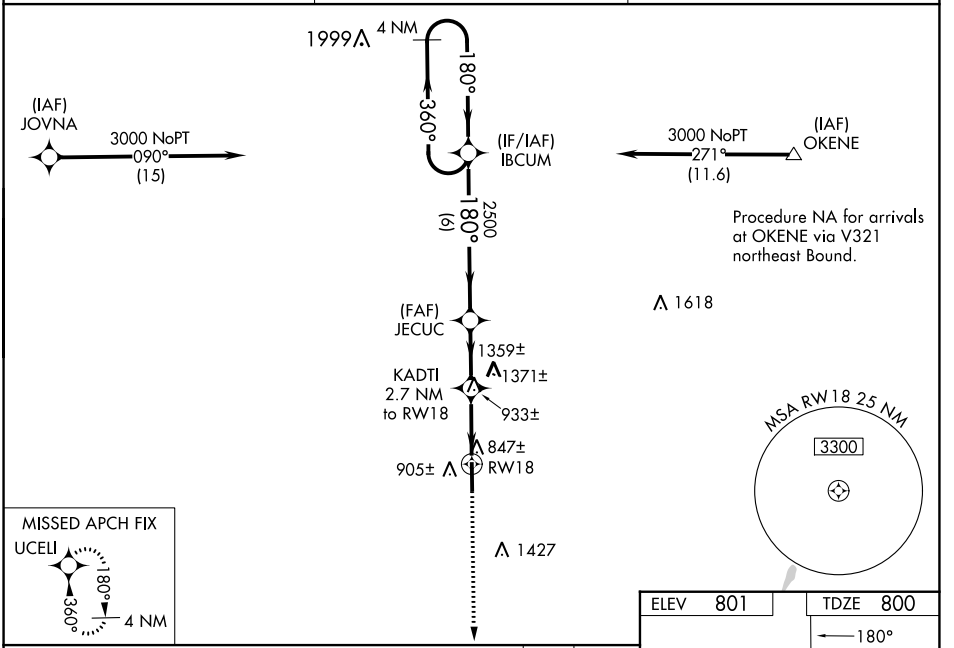

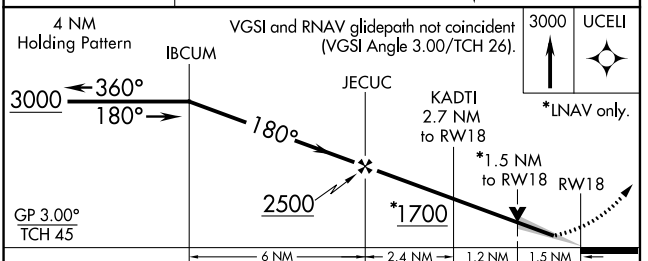

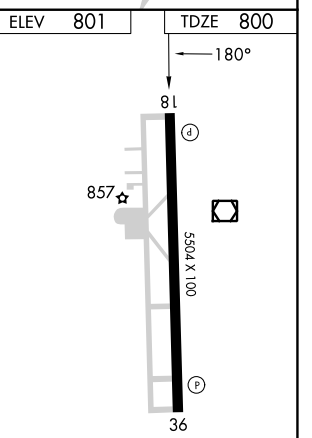

CATEGORY	A	B	C	D
LPV DA	1050-¾ 250 (300-¾)			
LNAV/VNAV DA	1316-1¾ 516 (600-1¾)			
LNAV MDA	1280-1 480 (500-1)		1280-1¼ 480 (500-1¼)	1280-1½ 480 (500-1½)
C CIRCLING	1280-1 479 (500-1)	1420-1 619 (700-1)	1780-3 979 (1000-3)	

MIRL Rwy 18-36 L
REIL Rwys 18 and 36

SE-1, 22 FEB 2024 to 21 MAR 2024
SE-1, 22 FEB 2024 to 21 MAR 2024