

WAAS
CH **49144**
W14A

APP CRS
140°

Rwy Idg
TDZE **181**
Apt Elev **187**

RNAV (GPS) RWY 14


STATESBORO-BULLOCH COUNTY (TBR)

RNP APCH-GPS.

⚠ Circling to Rwy 6/24 NA at night. Baro-VNAV and VDP NA when using Sylvania altimeter setting. Rwy 14 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Sylvania altimeter setting and increase LPV DA to 525 feet and all visibilities $\frac{1}{2}$ SM. Increase LNAV/VNAV DA to 547 feet; increase all MDAs 40 feet and LNAV visibility Cat C/D $\frac{1}{4}$ SM, and Circling visibility Cat C $\frac{1}{4}$ SM.

MISSED APPROACH:
Climb to 2600 direct HENUT and hold.

AWOS-3 119.025	SAVANNAH APP CON★ 118.4 354.0	UNICOM 122.725 (CTAF) 0
--------------------------	---	-----------------------------------

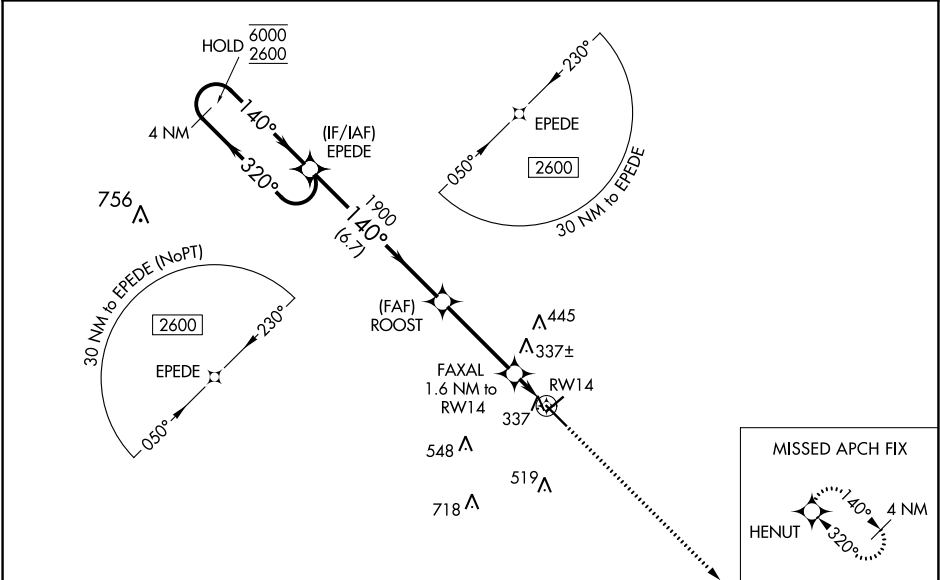

ELEV 187		D TDZE 181	
VGSi and RNAV glidepath not coincident (VGSi Angle 4.00/TCH 42).		2600 HENUT	
4 NM Holding Pattern		EPEDE	
6000 ← 320°		ROOST 1900	
2600 → 140°		FAXAL 1.6 NM to RW14	
GP 3.00°		0.9 NM to RW14	
TCH 45		740	
		6.7 NM	
		3.6 NM	
		0.7 NM	
		0.9 NM	
CATEGORY	A	B	C
LPV DA	496-7 $\frac{7}{8}$	315 (400-7 $\frac{7}{8}$)	
LNAV/VNAV DA	518-1	337 (400-1)	
LNAV MDA	600-1	419 (500-1)	600-1 $\frac{1}{8}$ 419 (500-1 $\frac{1}{8}$)
CIRCLING	640-1 453 (500-1)	740-1 553 (600-1)	840-1 $\frac{3}{4}$ 653 (700-1 $\frac{3}{4}$) 860-2 $\frac{1}{4}$ 673 (700-2 $\frac{1}{4}$)
HIRL Rwy 14-32 0			