

WAAS
CH **48802**
W05A

APP CRS
051°

Rwy Idg **9508**
TDZE **953**
Apt Elev **986**

RNAV (GPS) RWY 5L
MC GHEE TYSON (T'YS)

RNP APCH - GPS.

⚠

ASR

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C.
**RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

⚠


AS

⚠

AS

MISSED APPROACH: Climb to 1500 then climb to 4000 direct VXV VORTAC and hold, continue climb-in-hold to 4000.

ATIS 128.35	KNOXVILLE APP CON 123.9 360.8	KNOXVILLE TOWER 121.2 257.8	GND CON 121.9 348.6	CLNC DEL 121.65
-----------------------	---	---------------------------------------	-------------------------------	---------------------------

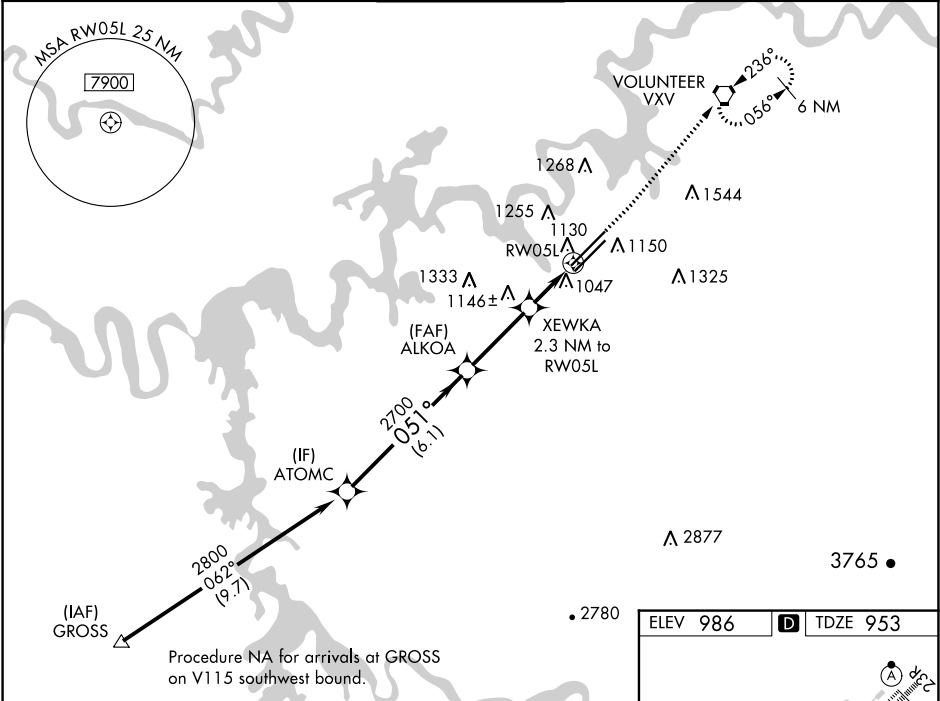

ATOMC

2800

051°

2700

1700

GP 3.00°
TCH 55

6.1 NM

3.1 NM

1.1 NM

1.2 NM

1500

4000

VXV

1.2 NM to RW05L

RW05L

CATEGORY	A	B	C	D
LPV DA**	1153/24		200 (200-½)	
LNAV/VNAV DA	1291/26		338 (400-½)	
LNAV MDA	1380/24 427 (400-½)		1380/40 427 (400-¾)	
CIRCLING	1500-1 514 (600-1)	1560-1 574 (600-1)	1660-2 674 (700-2)	1900-3 914 (1000-3)

TWR
1094

1000 X 150

800 X 150

0.85° UP

0.35° DOWN

051°

HIRL Rwy 5L-23R and 5R-23L
REIL Rwy 5R and 23L
TDZ/CL Rwy 5R and 23R