

WAAS
CH **93702**
W06A

APP CRS
057°

Rwy Idg
TDZE **2351**
Apt Elev **2351**

RNAV (GPS) RWY 6
GENERAL WM J FOX AIRFIELD (WJT')


▼ When VGSI inop, Straight-in/Circling Rwy 6 procedure NA at night.

▲ DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 45°C (113°F). When local altimeter setting not received, use Palmdale altimeter setting: increase LPV DA to 2661 feet, LNAV/VNAV DA to 2709 feet and all MDAs 60 feet, and increase Circling Cats C/D visibility ¼ SM. Baro-VNAV NA when using Palmdale altimeter setting.

MISSED APPROACH: Climb to 6000 direct SISOY and via 091° track to ETHER and hold.

ATIS 126.3	JOSHUA APP CON 126.1 290.3	FOX TOWER* 118.525 (CTAF) 256.9	GND CON 121.7 256.9	UNICOM 122.95
----------------------	--------------------------------------	---	-------------------------------	-------------------------

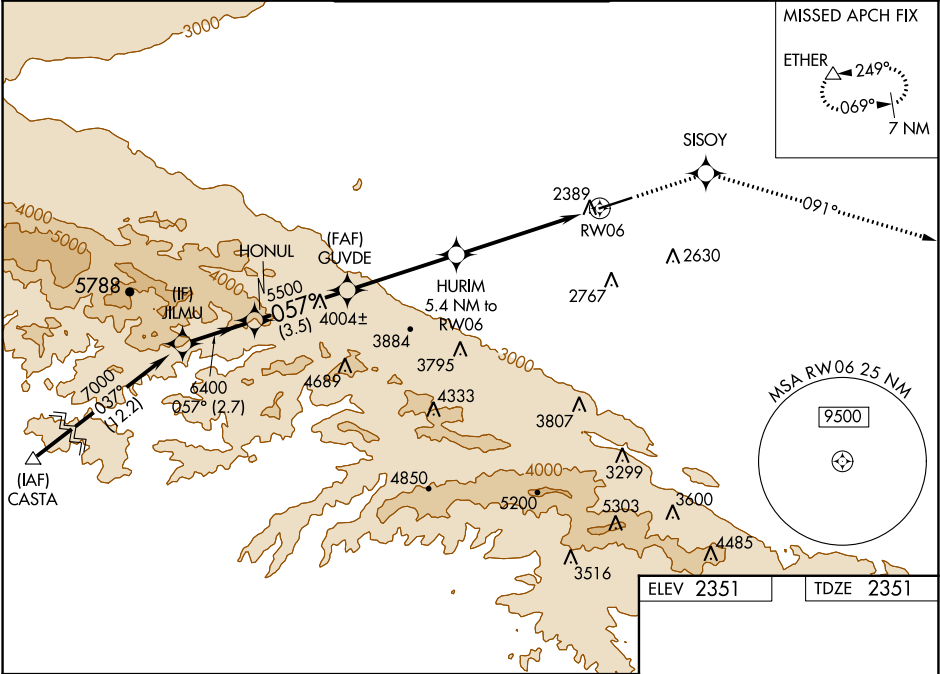

JILMU
7000
Procedure Turn NA
GP 3.00°
TCH 40

HONUL
6400

GUVDE
5500

HURIM
5.4 NM to RWY 06

SISOY
6000

tr 091°

ETHER
△

*LNAV only.

*4100

RWY 06

057° to RWY 06

7201 X 150
2421

CATEGORY	A	B	C	D
LPV DA	2601-1 250 (300-1)			
LNAV/VNAV DA	2649-1 298 (300-1)			
LNAV MDA	2940-1 589 (600-1)		2940-1½ 589 (600-1½)	2940-1¾ 589 (600-1¾)
CIRCLING	2940-1 589 (600-1)		3120-2¼ 769 (800-2¼)	3120-2½ 769 (800-2½)

REIL Rwy 6 and 24
MIRL Rwy 6-24