

WAAS CH 86702 W16A	APP CRS 163°	Rwy ldg TDZE Apt Elev	4601 16 16
--	------------------------	-----------------------------	---------------------------------------


RNAV (GPS) RWY 16

EMMONAK (ENM) (PAEM)

⚠ If local altimeter setting not received, use St Mary's altimeter setting and increase all DAs 168 feet and all MDAs 180 feet. VDP NA with St Mary's altimeter setting. DME/DME RNP- 0.3 NA. Baro-VNAV NA when using St Mary's altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 48°C (119°F).

MISSED APPROACH: Climb to 1600 direct KAVWI and right turn via 248° track to SOCGO and right turn via 355° track to LIKUQ and hold.

AWOS-3P 135.35	ANCHORAGE CENTER 124.5	CTAF 122.9 0
--------------------------	----------------------------------	------------------------

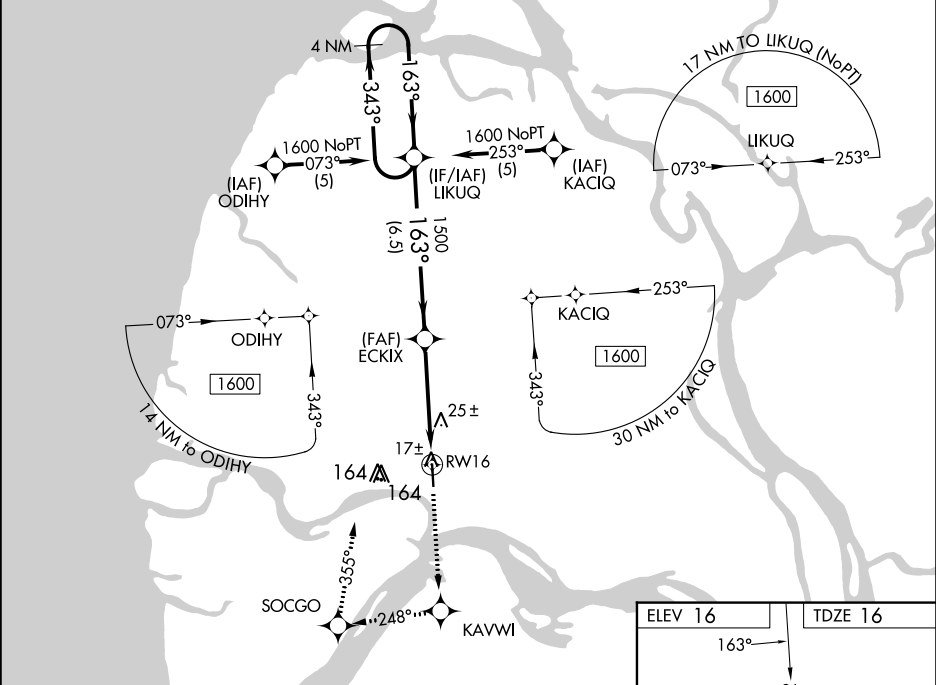

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 32).				1600 ↑	KAVWI ✦	SOCGO tr 248° ↷	LIKUQ tr 355° ↷
4 NM Holding Pattern				* LNAV only			
1600 ← 343° 163° →				ECKIX			
GP 3.00° TCH 35				* 0.7 NM to RW16			
				RW16			
				6.5 NM			
				3.8 NM			
				0.7			
CATEGORY	A		B		C		D
LPV DA			266-1		250 (300-1)		
LNAV/ VNAV DA			280-1		264 (300-1)		
LNAV MDA			280-1		264 (300-1)		
CIRCLING	520-1	504 (600-1)	520-1½ 504 (600-1½)		580-2 564 (600-2)		