

WAAS
CH **77622**
W15A

APP CRS
148°

Rwy Idg
TDZE **1061**
Apt Elev **1062**


RNAV (GPS) RWY 15

HUTCHINSON MUNI/BUTLER FLD (HCD)

⚠ Baro-VNAV NA when using Glencoe altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA with Glencoe altimeter setting. When local altimeter setting not received, use Glencoe altimeter setting and increase all DA 43 feet and LPV and LNAV/VNAV all Cats visibility ½ mile; increase all MDA 60 feet and LNAV Cat C visibility ¼ mile.

MISSED APPROACH: Climb to 3000 direct WOBGI and hold.

AWOS-3 118.525	MINNEAPOLIS CENTER 127.1 290.2	GCO 121.725	UNICOM 122.8 (CTAF) 0
--------------------------	--	-----------------------	--

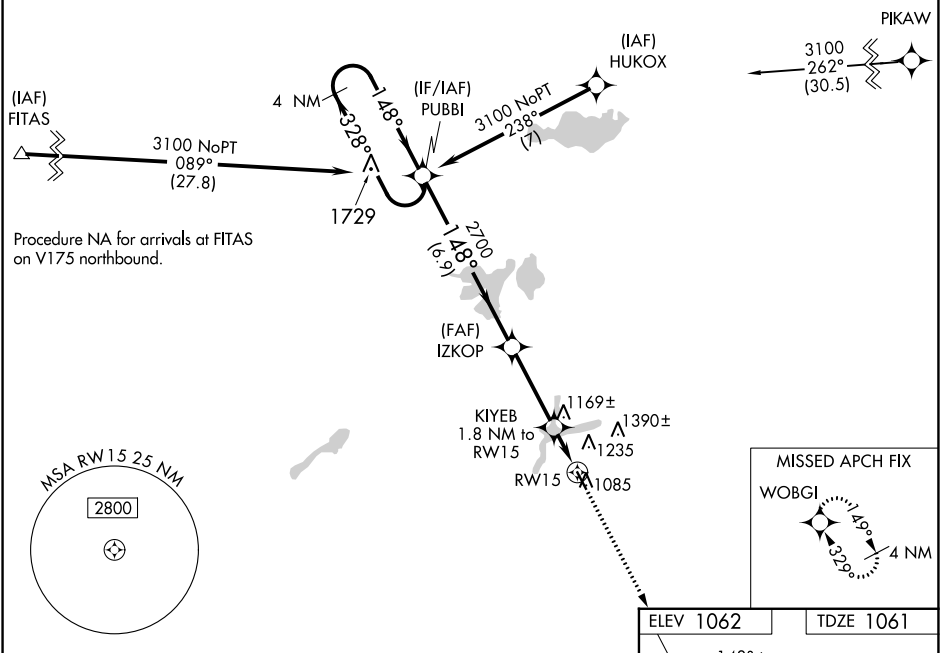

4 NM Holding Pattern
PUBBI

3100
328° 148°

GP 3.00° TCH 40

IZKOP
2700

KIYEB 1.8 NM to RW15
* LNAV only

* 1 NM to RW15

RW15

6.9 NM 3.2 NM 0.8 1 NM

3000 WOBGI

400 X 75

33

CATEGORY	A	B	C	D
LPV DA	1311-7/8	250 (300-7/8)		NA
LNAV/VNAV DA	1328-7/8	267 (300-7/8)		NA
LNAV MDA	1420-1	359 (400-1)		NA
CIRCLING	1540-1	478 (500-1)	1740-2 678 (700-2)	NA

MIRL Rwy 15-33 **0**
REIL Rwys 15 and 33 **0**

WAAS
CH **86322**
W33A

APP CRS
329°

Rwy Idg
TDZE **1062**
Apt Elev **1062**

RNAV (GPS) RWY 33

HUTCHINSON MUNI/BUTLER FLD (HCD)

▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 3100 direct PUBBI and hold.

AWOS-3 118.525	MINNEAPOLIS CENTER 127.1 290.2	GCO 121.725	UNICOM 122.8 (CTAF) 0
--------------------------	--	-----------------------	---------------------------------

MISSED APCH FIX

4 NM

148°

328°

PUBBI

△1554

△1390±

1085

1179±

RW33

CUNGI

1.6 NM to RW33

(FAF) NOYRI

2700

329°

(IF/IAF) WOBI

149°

329°

4 NM

3000 NoPT

277° (27.4)

(IAF) WULEP

Procedure NA for arrivals at WULEP on V456 northbound.

MSA RW33 25 NM

2800

ELEV 1062

TDZE 1062

51

4000-175

33

329° to RW33

MIRL Rwy 15-33

REIL Rws 15 and 33

3100

PUBBI

*LNAV only

*1.1 NM to RW33

RW33

1.1 NM

0.5

3.4 NM

6.9 NM

CUNGI

1.6 NM to RW33

NOYRI

2700

329°

2700

149°

3000

GP 3.00°

TCH 40

4 NM Holding Pattern

CATEGORY	A	B	C	D
LPV DA	1312-1	250 (300-1)		NA
LNAV/VNAV DA	1349-1	287 (300-1)		NA
LNAV MDA	1440-1	378 (400-1)		NA
CIRCLING	1540-1	478 (500-1)	1740-2 678 (700-2)	NA

HUTCHINSON, MINNESOTA

Orig-C 25MAR21

HUTCHINSON MUNI/BUTLER FLD (HCD)

44°52'N-94°23'W


RNAV (GPS) RWY 33

VORTAC DWN	APP CRS	Rwy Idg	4000
109.0	340°	TDZE	1062
Chan 27		Apt Elev	1062

VOR RWY 33

HUTCHINSON MUNI/BUTLER FLD (HCD)

DME required.		MISSED APPROACH: Climb to 2000 then climbing left turn to 2700 on DWN VORTAC R-160 to HOFFA/19.4 DME and hold.	
AWOS-3	MINNEAPOLIS CENTER	GCO	UNICOM
118.525	127.1 290.2	121.725	122.8 (CTAF) 0

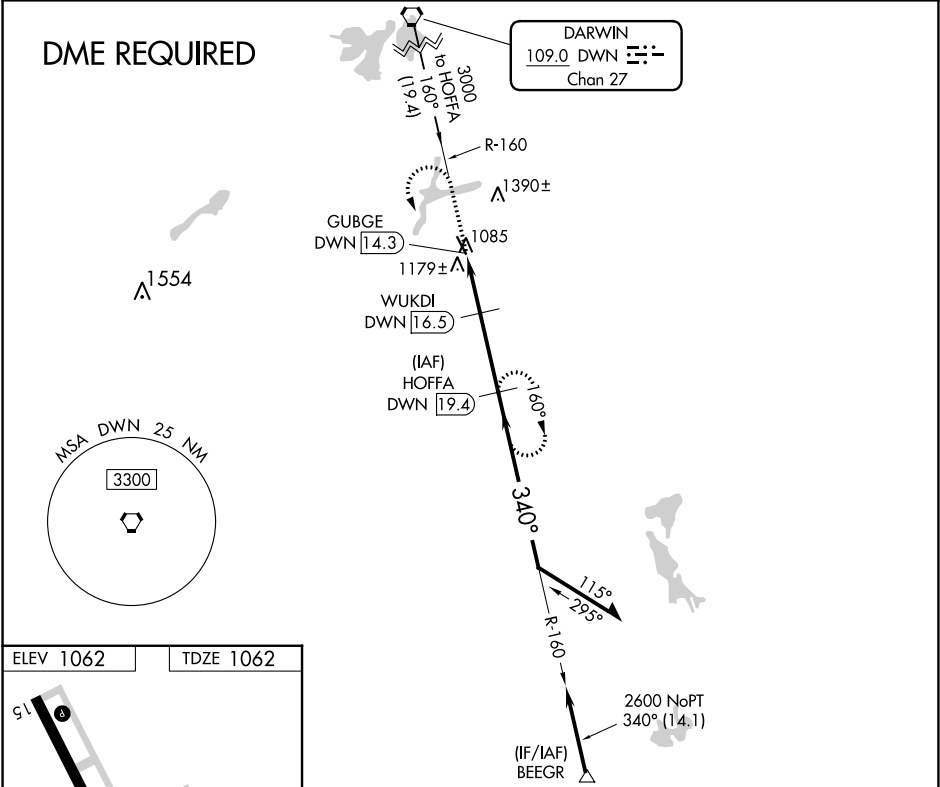

2000 ↑	2700 DWN R-160	HOFFA DWN 19.4	VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 40).	
			Remain within 10 NM	
WUKDI DWN 16.5		HOFFA DWN 19.4	2700	
GUBGE DWN 14.3		1600	2600	
1.2 NM		1 NM	2.9 NM	
CATEGORY	A	B	C	D
S-33	1460-1	398 (400-1)	1460-1 1/8 398 (400-1 1/8)	NA
CIRCLING	1540-1	478 (500-1)	1740-2 678 (700-2)	NA