

WAAS CH 42619 W36A	APP CRS 003°	Rwy Idg TDZE 4600 3318 Apt Elev 3326
--	------------------------	--

RNAV (GPS) RWY 36


SYRACUSE-HAMILTON COUNTY MUNI (3K3)

RNP APCH-GPS.

⚠ Baro-VNAV NA when using Lamar altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). Helicopter visibility reduction below ¾ SM NA. Circling to Rwy 13-31 NA at night. VDP NA with Lamar altimeter setting. When local altimeter setting not received, use Lamar altimeter setting: increase LPV DA to 3723 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 3932 feet and all visibilities ¾ SM; increase all MDAs 160 feet and visibility Circling Cat A/B ¼ SM and LNAV Cat C and Circling Cat C ½ SM.

MISSED APPROACH:
Climb to 5700 direct ISSOY and hold.

AWOS-3 119.975	DENVER CENTER 133.4 377.175	UNICOM 122.8 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

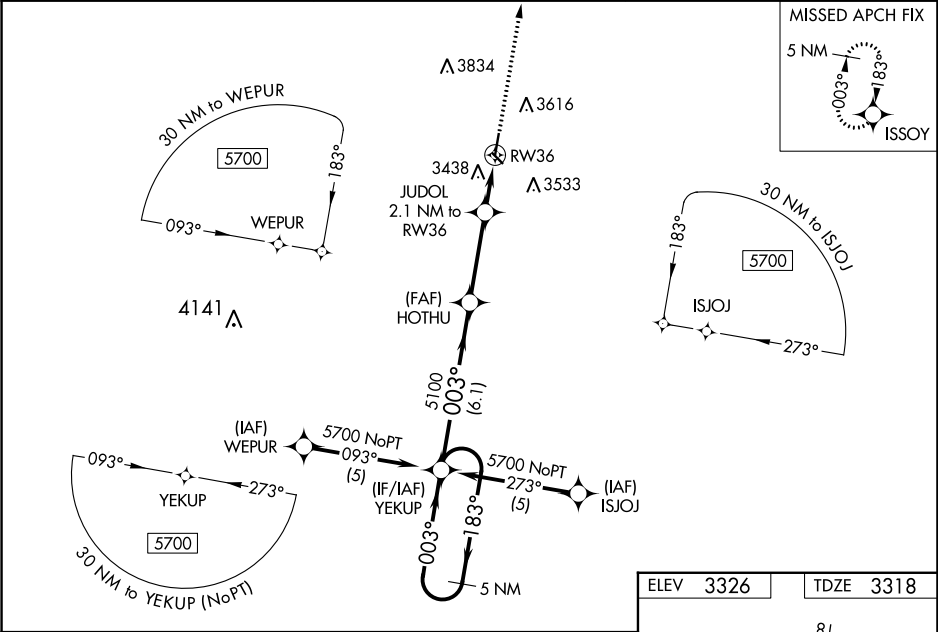

5 NM Holding Pattern

YEKUP

HOTHU

JUDOL 2.1 NM to RW36

ISSOY

5700

183°

003°

003°

5100

5100

*4020

*1.1 NM to RW36

RW36

GP 3.00° TCH 44

6.1 NM

3.3 NM

1 NM

1.1 NM

CATEGORY	A	B	C	D
LPV DA	3569-1 251 (300-1)			NA
LNAV/VNAV DA	3778-1¾ 460 (500-1¾)			NA
LNAV MDA	3740-1 422 (500-1)	3740-1¼ 422 (500-1¼)		NA
CIRCLING	3980-1 654 (700-1)	4200-2½ 874 (900-2½)		NA

*INAV only

4600 X 75

3000 X 40

003°

MIRL Rwy 13-31

MIRL Rwy 18-36