



WAAS CH 77944 W17A	APP CRS 172°	Rwy Idg TDZE 2322 Apt Elev 2322
--	------------------------	---

RNAV (GPS) RWY 17

NESS CITY MUNI (48K)

RNP APCH - GPS.	MISSED APPROACH: Climb to 4400 direct HABAT and hold.
Baro-VNAV NA. Use Hays Rgnl altimeter setting, when not received, use Hill City altimeter setting and increase LPV DA to 2659 feet, increase LNAV/VNAV DA to 2758 feet, and increase all MDAs 20 feet.	

HYS AWOS-3PT 125.525	KANSAS CITY CENTER 124.4 322.4	CTAF 122.9 0
--------------------------------	--	------------------------

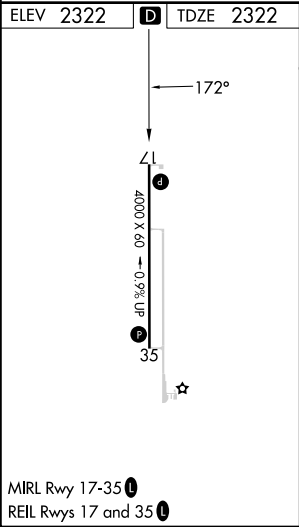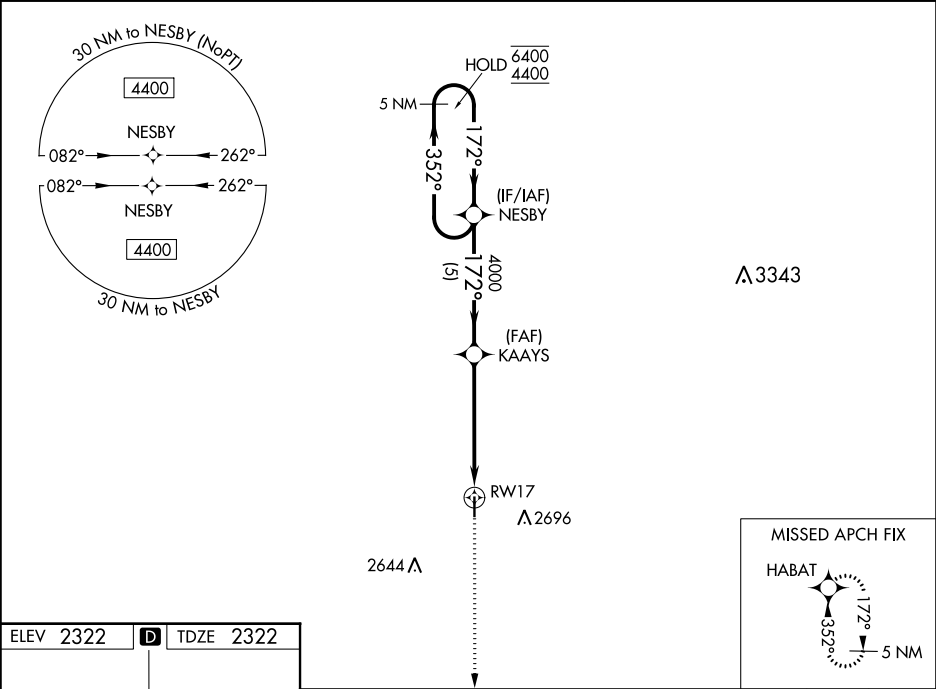

5 NM Holding Pattern				4400	HABAT
GP 3.00° TCH 40				4000	
5 NM				5.1 NM	
CATEGORY	A	B	C	D	
LPV DA	2653-1	331 (400-1)	NA		
LNAV/VNAV DA	2752-1¼	430 (500-1¼)	NA		
LNAV MDA	3080-1 758 (800-1)	3080-1¼ 758 (800-1¼)	NA		
CIRCLING	3080-1 758 (800-1)	3140-1¼ 818 (900-1¼)	NA		

NESS CITY, KANSAS

AL-9052 (FAA)

23110



WAAS CH 82244 W35A	APP CRS 352°	Rwy Idg TDZE Apt Elev	4000 2315 2322
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 35


NESS CITY MUNI (48K)

RNP APCH - GPS.	
▼ NA Rwy 35 helicopter visibility reduction below ¾ SM NA. Baro-VNAV NA. Use Hays Rgnl altimeter setting, when not received, use Hill City altimeter setting and increase LPV DA to 2702 feet, increase LNAV/VNAV DA to 2714 feet, increase all MDAs 20 feet.	MISSED APPROACH: Climb to 4400 direct NESBY and hold.

HYS AWOS-3PT 125.525	KANSAS CITY CENTER 124.4 322.4	CTAF 122.90
--------------------------------	--	-----------------------

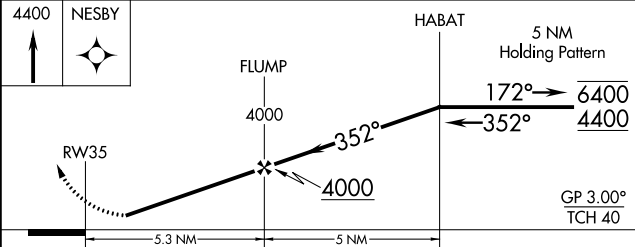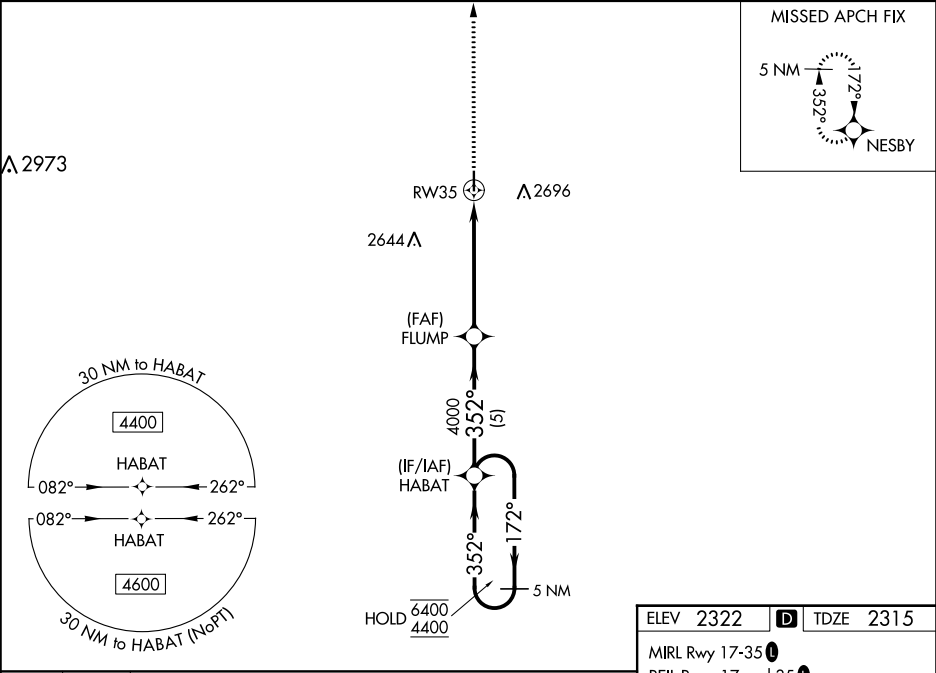

CATEGORY	A	B	C	D
LPV DA	2696-1⅛	381 (400-1⅛)		NA
LNAV/VNAV DA	2708-1⅛	393 (400-1⅛)		NA
LNAV MDA	2860-1	545 (600-1)		NA
CIRCLING	3020-1 698 (700-1)	3140-1¼ 818 (900-1¼)		NA

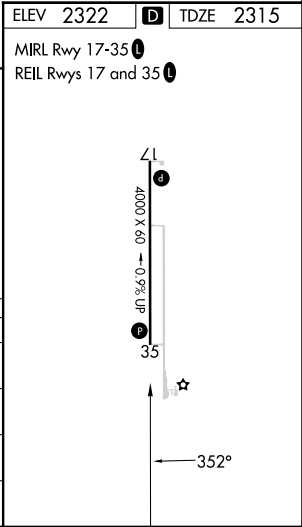

NESS CITY, KANSAS
Orig 20APR23

38°28'N-99°55'W

NESS CITY MUNI (48K)

RNAV (GPS) RWY 35

NC-2, 22 FEB 2024 to 21 MAR 2024

NC-2, 22 FEB 2024 to 21 MAR 2024