


WAAS CH 70711 W34A	APP CRS 340°	Rwy Idg 7100 TDZE 1232 Apt Elev 1232
--	------------------------	---


RNAV (GPS) RWY 34

BRAINERD LAKES RGNL (BRD)

RNP APCH.		MALSR 	MISSED APPROACH: Climb to 3300 direct KRINK and on track 294° to CUCAC and hold.
T Baro-VNAV and VDP NA when using Aitkin altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Aitkin altimeter setting; increase LPV DA to 1484, LNAV/VNAV DA to 1636 and LNAV/VNAV visibility ¼ SM; increase all MDAs 60 feet and LNAV Cats C and D visibility ¼ SM. For Inop ALS when using Aitkin altimeter setting, increase LNAV Cat D visibility to 1½ SM.			
ASOS 126.775		MINNEAPOLIS CENTER 118.05 239.0	UNICOM 122.7 (CTAF) 

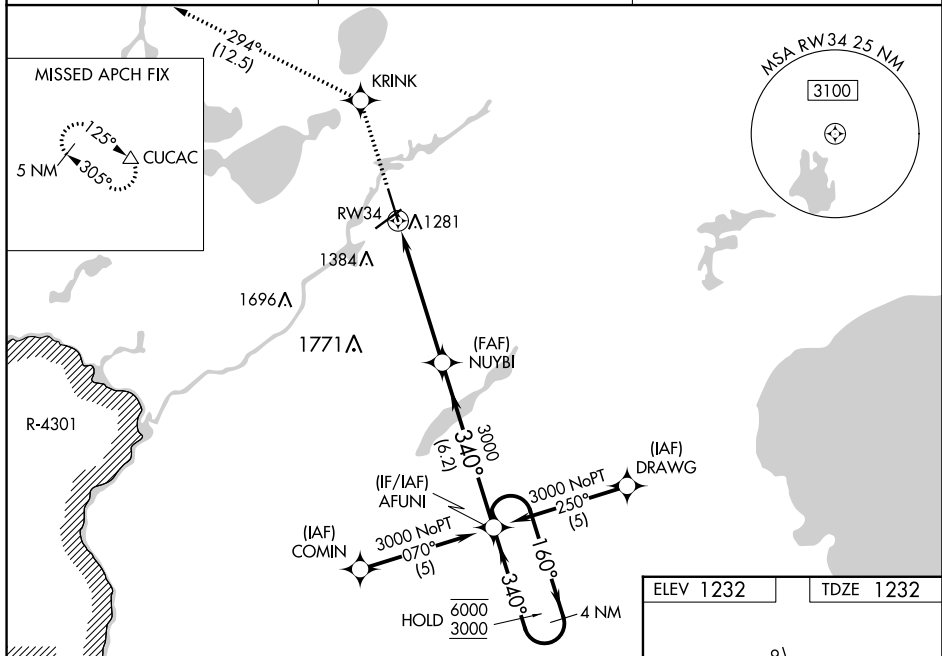

3300 ↑		KRINK ✦		tr 294°		CUCAC △		NUYBI		AFUNI		4 NM Holding Pattern	
*LNAV only		*1 NM to RW34						← 340°		→ 160°		6000 3000	
RW34								3000				GP 3.00° TCH 46	
1 NM		4.3 NM		6.2 NM									
CATEGORY		A		B		C		D					
LPV	DA	1432-½		200 (200-½)									
LNAV/ VNAV	DA	1584-¾		352 (400-¾)									
LNAV	MDA	1620-½ 388 (400-½)		1620-⅝ 388 (400-⅝)		1620-1 388 (400-1)							
C CIRCLING		1760-1 528 (600-1)		1760-1½ 528 (600-1½)		1860-2 628 (700-2)							

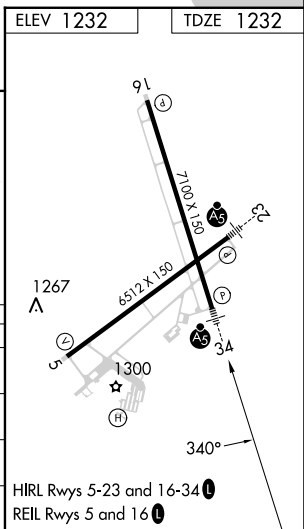

RNAV (GPS) RWY 34