


WAAS CH 97533 W19A	APP CRS 193°	Rwy Idg TDZE 857 Apt Elev 858
--	------------------------	---


RNAV (GPS) RWY 19
KEWANEE MUNI (EZI)

RNP APCH - GPS.	Baro-VNAV NA. Use Galesburg altimeter setting. When local altimeter setting not received, use Moline altimeter setting and increase LPV DA to 1212 feet; increase LNAV/VNAV DA to 1446 feet and all visibilities 1/8 SM. Increase all MDAs 40 feet and LNAV visibility Cat C 1/8 SM, and Circling visibility Cat C 1/4.	MISSED APPROACH: Climb to 2400 direct JUBDI and hold.
-----------------	---	--

QUAD CITY APP CON ★ 133.275 257.8	UNICOM 122.8 (CTAF) 0
---	---------------------------------

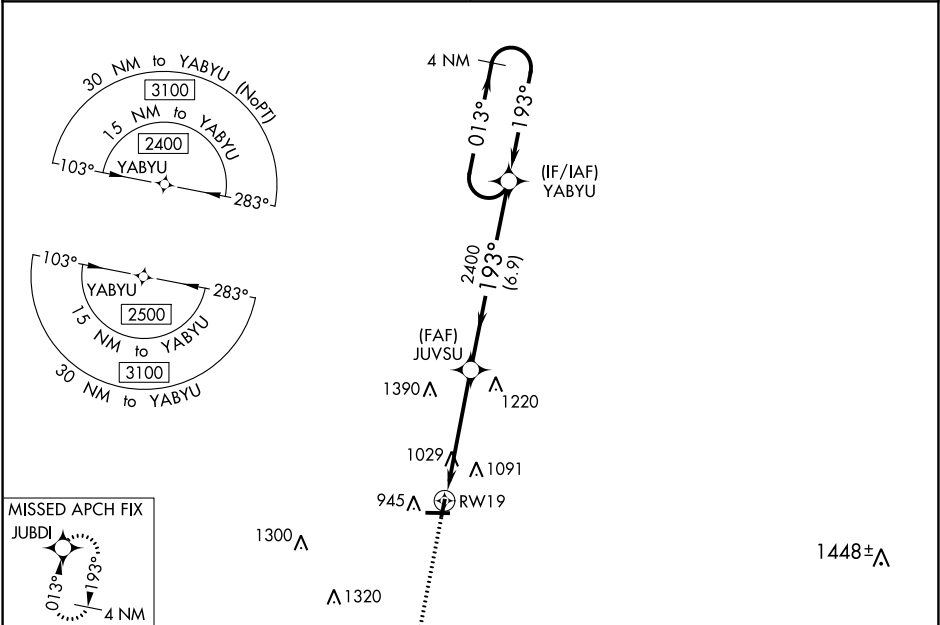

ELEV 858	TDZE 857
-----------------	-----------------

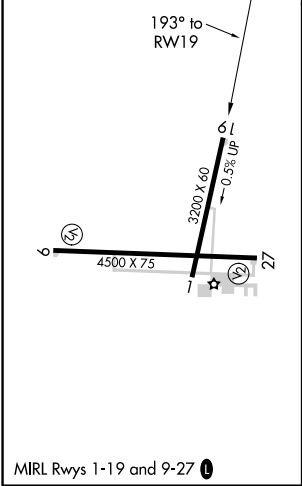

2400

↑

JUBDI

✦

4 NM Holding Pattern

JUVSU

2400

YABYU

RW19

193°

013°

193°

2400

GP 3.00° TCH 40

4.8 NM

6.9 NM

CATEGORY	A	B	C	D
LPV DA	1182-1 325 (400-1)			NA
LNAV/VNAV DA	1416-1 ⁵ / ₈ 559 (600-1 ⁵ / ₈)			NA
LNAV MDA	1400-1	543 (600-1)	1400-1 ⁵ / ₈ 543 (600-1 ⁵ / ₈)	NA
CIRCLING	1400-1 542 (600-1)	1520-1 662 (700-1)	1520-1 ³ / ₄ 662 (700-1 ³ / ₄)	NA