



LOC/DME I-HRL	APP CRS	Rwy Idg	8301
111.5	176°	TDZE	35
Chan 52		Apt Elev	36

ILS or LOC RWY 17R

VALLEY INTL (HRL)

ADF or DME required.	MALSR	MISSED APPROACH: Climb to 800 then climbing left turn to 1600 direct SEBAS LOM/I-HRL 5.5 DME and hold.
For inop ALS, increase S-ILS Cat E visibility to RVR 4000, increase S-LOC Cat E visibility to 1½ SM. Procedure turn NA Cat E. #RVR 1800 authorized with the use of FD or AP or HUD to DA.		

ATIS 124.85	VALLEY APP CON 120.7 279.5	HARLINGEN TOWER ★ 119.3 (CTAF) 0 317.6	GND CON 121.7	UNICOM 122.95
-----------------------	--------------------------------------	--	-------------------------	-------------------------

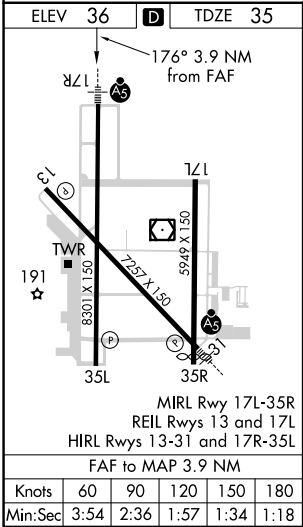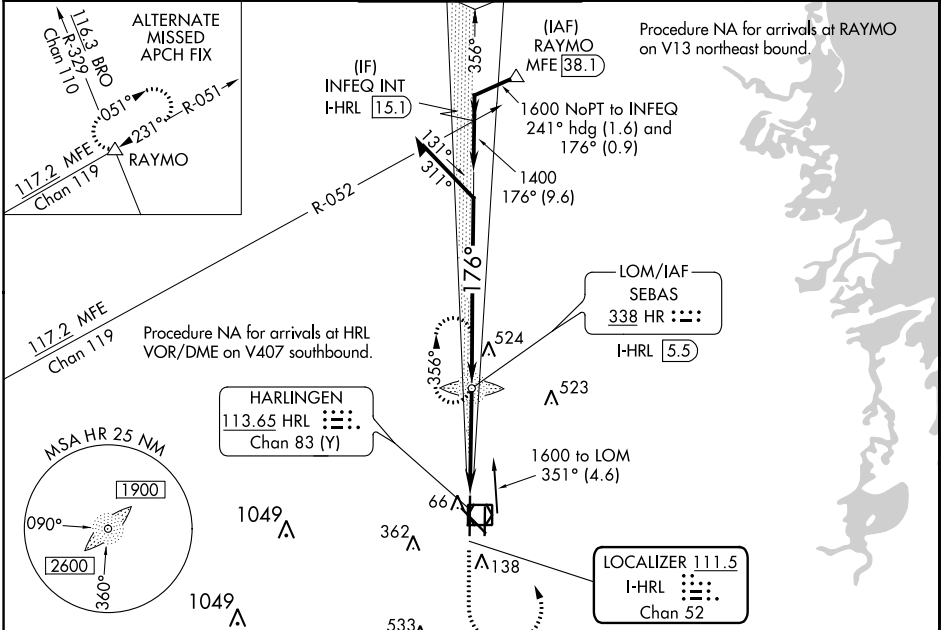

800		1600		HR		HR LOM SEBAS I-HRL 5.5		Remain within 10 NM			
↑		↷									
* LOC only.											
		*I-HRL 2.8		1323		356°		1600			
		I-HRL 1.6		176°		1400		GS 3.00° TCH 55			
CATEGORY		A		B		C		D		E	
S-ILS 17R #		235/24 200 (200-½)									
S-LOC 17R		480/24 445 (500-½)		480/45 445 (500-¾)		480/50 445 (500-1)					
CIRCLING		500-1 464 (500-1)		560-1 524 (600-1)		680-1¾ 644 (700-1¾)		680-2 644 (700-2)		NA	