RNAV (GPS) RWY 21

SAMUELS FLD (BRY)

WAAS	APP CRS	Rwy Idg	5003
CH 77816	207°	TDZE	669
W21A		Apt Elev	669

RNP APCH - GPS.

Rwy 21 helicopter visibility reduction below ¾ SM NA.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.

MISSED APPROACH: Climb to 3100 direct MAKRZ and hold.

AWOS-3	LOUISVILLE APP CON	UNICOM
119.925	132.075 327.0	122.8 (CTAF) L

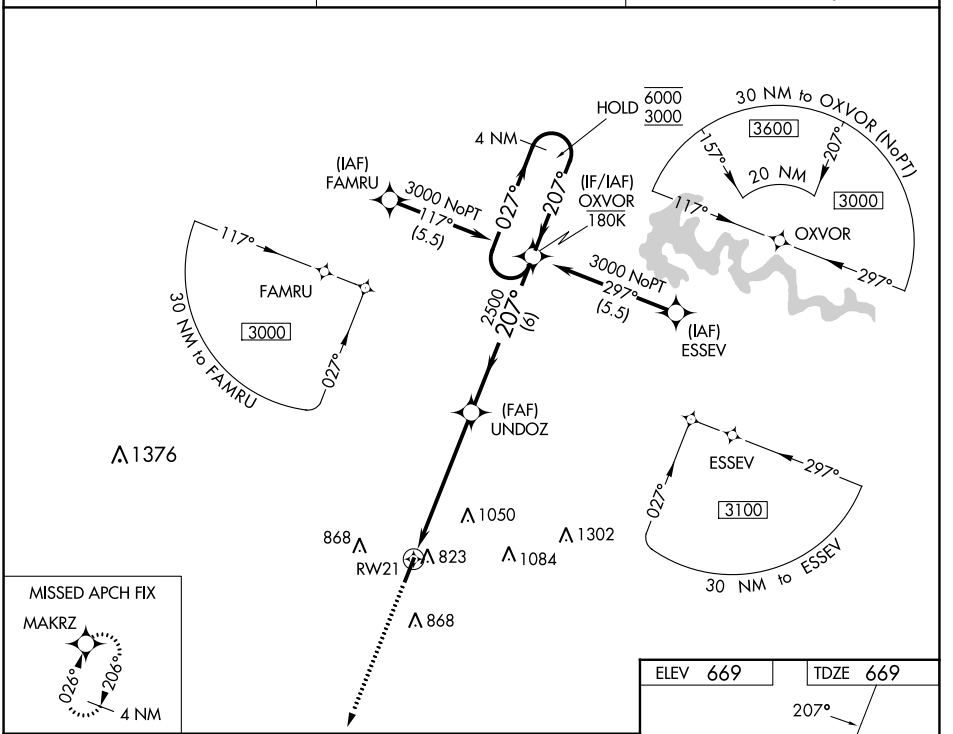

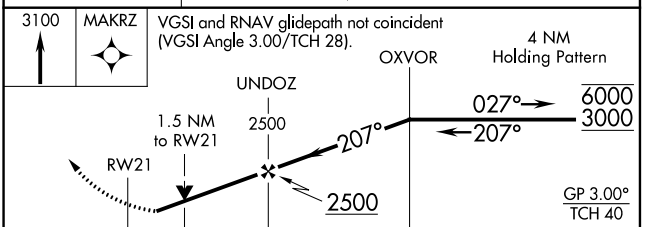

CATEGORY	A	B	C	D
LPV DA	919-¾ 250 (300-¾)			
LNAV/VNAV DA	1051-1⅛ 382 (400-1⅛)			
LNAV MDA	1180-1 511 (600-1)		1180-1⅜ 511 (600-1⅜)	
C CIRCLING	1200-1 531 (600-1)	1280-1 611 (700-1)	1360-2 691 (700-2)	1480-2¾ 811 (900-2¾)

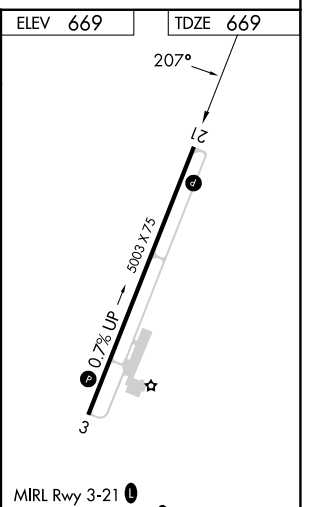

MIRL Rwy 3-21 L
REIL Rwys 3 and 21 L

SE-1, 22 FEB 2024 to 21 MAR 2024
SE-1, 22 FEB 2024 to 21 MAR 2024

RNAV (GPS) RWY 3

SAMUELS FLD (BRY)

APP CRS	Rwy Idg	5003
026°	TDZE	655
	Apt Elev	669

RNP APCH - GPS.

Rwy 3 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 3000 direct OXVOR and hold.

AWOS-3	LOUISVILLE APP CON	UNICOM
119.925	132.075 327.0	122.8 (CTAF) L

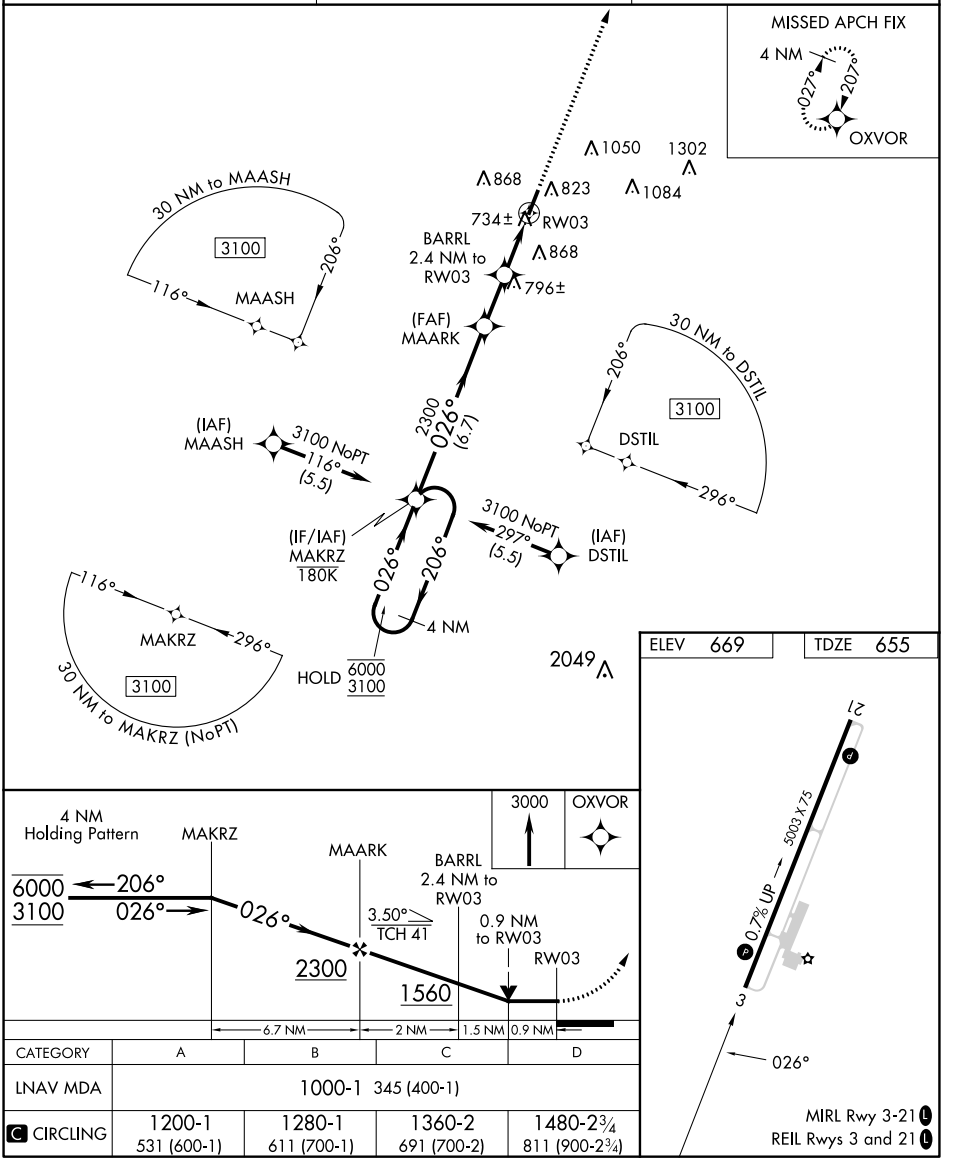

CATEGORY	A	B	C	D
LNAV MDA	1000-1 345 (400-1)			
C CIRCLING	1200-1 531 (600-1)	1280-1 611 (700-1)	1360-2 691 (700-2)	1480-2¾ 811 (900-2¾)

SE-1, 22 FEB 2024 to 21 MAR 2024

VOR/DME EWO	APP CRS	Rwy Idg	5003
113.95	037°	TDZE	655
Chan 86 (Y)		Apt Elev	669

VOR RWY 3

SAMUELS FLD (BRY)

T A Straight-in and Circling minimums NA at night.
Rwy 3 helicopter visibility reduction below 1 SM NA.
DME required.

MISSED APPROACH: Climbing left turn to 2500 direct EWO VOR/DME and hold.

AWOS-3	LOUISVILLE APP CON	UNICOM
119.925	132.075 327.0	122.8 (CTAF) L

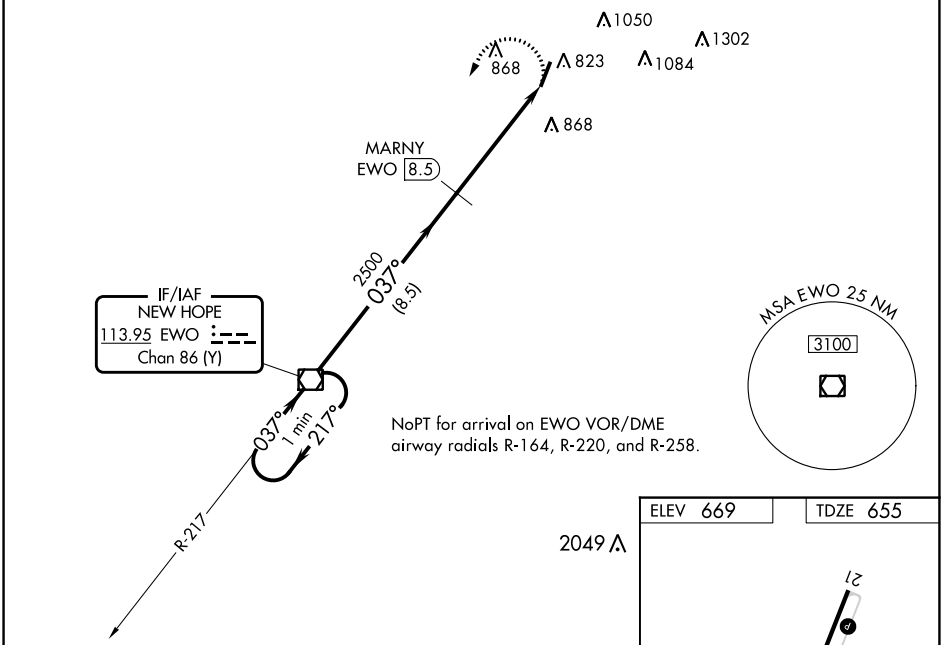

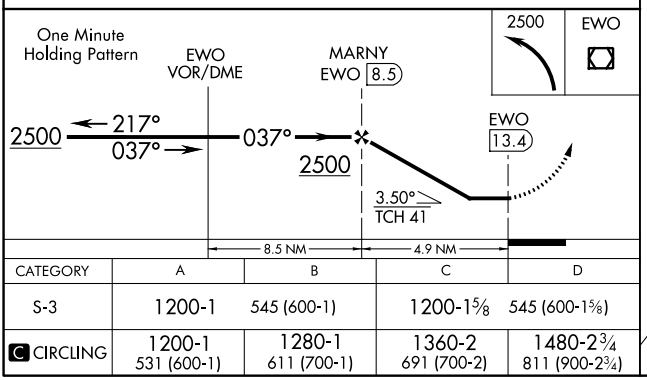

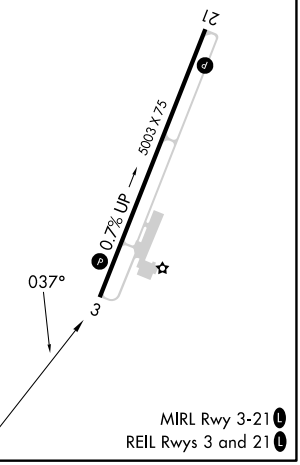

CATEGORY	A	B	C	D
S-3	1200-1	545 (600-1)	1200-1⅝	545 (600-1⅝)
C CIRCLING	1200-1 531 (600-1)	1280-1 611 (700-1)	1360-2 691 (700-2)	1480-2¾ 811 (900-2¾)

MIRL Rwy 3-21 L
REIL Rwys 3 and 21 L

SE-1, 22 FEB 2024 to 21 MAR 2024
SE-1, 22 FEB 2024 to 21 MAR 2024