RNAV (GPS) RWY 16

CARROLL COUNTY RGNL/JACK B POAGE FLD (DMW)

WAAS	APP CRS	Rwy Idg	5100
CH 65607	159°	TDZE	789
W16A		Apt Elev	789

Baro-VNAV NA when using Frederick altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). When local altimeter setting not received, use Frederick altimeter setting and increase LPV DA to 1199 feet, LNAV/VNAV DA to 1307 feet, and all MDAs 120 feet; increase LPV all Cats visibility ⅛ SM, LNAV Cat C visibility ⅜ SM, and Circling Cat C visibility ½ SM. When VGSI inop, Straight-in/Circling Rwy 16 procedure NA at night. DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.

MISSED APPROACH: Climb to 2200 direct NABIC then climbing left turn to 3000 on track 070° to FIGID and hold.

AWOS-3	POTOMAC APP CON	GCO	UNICOM
121.25	125.525 291.625	121.725	122.7 (CTAF) L

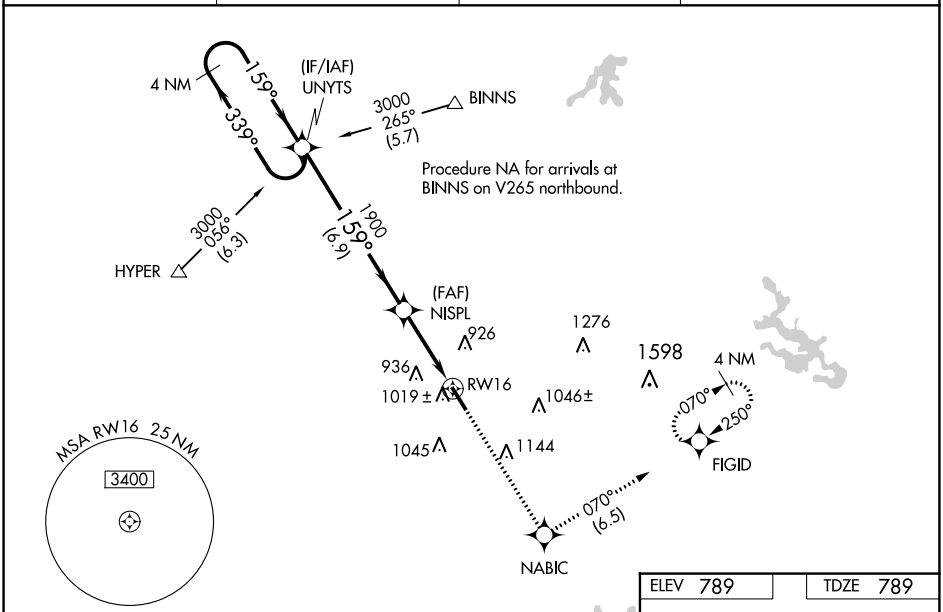

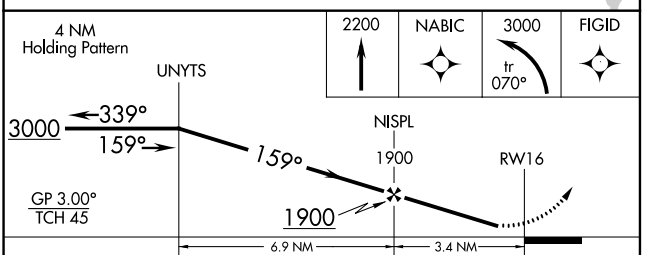

CATEGORY	A	B	C	D
LPV DA	1081-1 292 (300-1)			NA
LNAV/VNAV DA	1189-1⅜ 400 (400-1⅜)			NA
LNAV MDA	1280-1 491 (500-1)		1280-1⅜ 491 (500-1⅜)	NA
CIRCLING	1320-1 531 (600-1)	1400-1 611 (700-1)	1500-2 711 (800-2)	NA

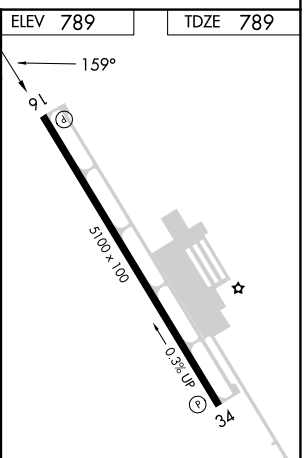

REIL Rwys 16 and 34 L
MIRL Rwy 16-34 L

NE-3, 22 FEB 2024 to 21 MAR 2024
NE-3, 22 FEB 2024 to 21 MAR 2024

RNAV (GPS) RWY 34

CARROLL COUNTY RGNL/JACK B POAGE FLD (DMW)

WAAS	APP CRS	Rwy Idg	5100
CH 82117	339°	TDZE	788
W34A		Apt Elev	789

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F).

MISSED APPROACH: Climb to 3000 direct UNYTS and hold

AWOS-3	POTOMAC APP CON	GCO	UNICOM
121.25	125.525 291.625	121.725	122.7 (CTAF) L

MISSED APCH FIX

4 NM 159° 339° UNYTS

MSA RW34 25 NM 3400

926 1276 1598 936 855± 1046± RW34 1045 1144

HEVIR 2 NM to RW34

(FAF) KATHH

2100 339° (6.1)

Procedure NA for arrivals at TAFFI on V166 eastbound.

(IAF) TAFFI 2600 258° (13.1)

(IF) FOUST

2600 055° (10) (IAF) WOOLY

2600 354° (5.8) (IAF) SLOAF

Procedure NA for arrivals at SLOAF on V268 southeast bound.

WASHINGTON DC METROPOLITAN SFRA

WARNING -- WASHINGTON DC SFRA. CTC POTOMAC APP CON

ELEV 789 TDZE 788

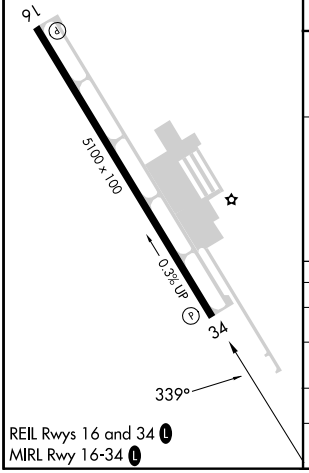

REIL Rwys 16 and 34 L

MIRL Rwy 16-34 L

3000 UNYTS

*LNAV only.

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 40).

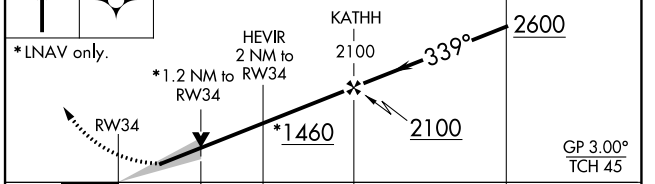

CATEGORY	A	B	C	D
LPV DA	988-1 200 (200-1)			NA
LNAV/VNAV DA	1105-1¼ 317 (400-1¼)			NA
LNAV MDA	1180-1 392 (400-1)			NA
CIRCLING	1320-1 531 (600-1)	1400-1 611 (700-1)	1500-2 711 (800-2)	NA

NE-3, 22 FEB 2024 to 21 MAR 2024
NE-3, 22 FEB 2024 to 21 MAR 2024

VOR RWY 34

CARROLL COUNTY RGNL/JACK B POAGE FLD (DMW)

VORTAC EMI 117.9 Chan 126	APP CRS 358°	Rwy Idg 5100 TDZE 788 Apt Elev 789

NA

MISSED APPROACH: Climbing left turn to 2900 direct EMI VORTAC and hold.

AWOS-3	POTOMAC APP CON	GCO	UNICOM
121.25	125.525 291.625	121.725	122.7 (CTAF)

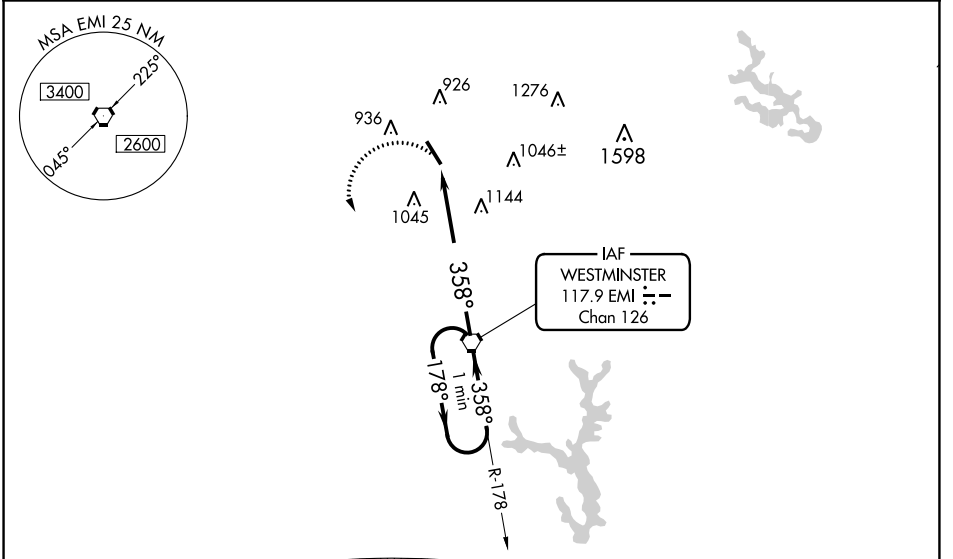

ELEV 789 TDZE 788

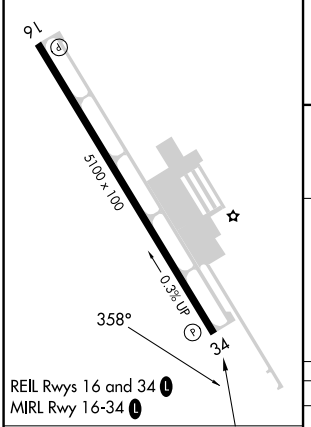

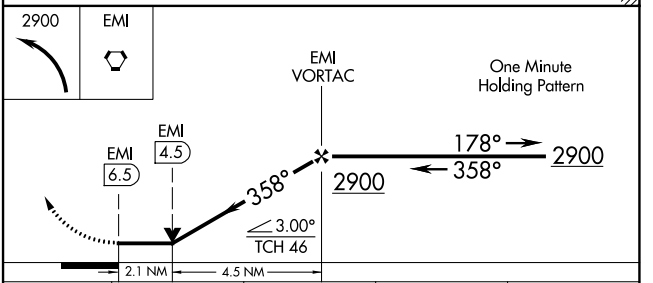

FAF to MAP 6.5 NM

Knots	60	90	120	150	180
Min:Sec	6:30	4:20	3:15	2:36	2:10

CATEGORY	A	B	C	D
S-34	1480-1	692 (700-1)	1480-2 692 (700-2)	NA
CIRCLING	1480-1	691 (700-1)	1500-2 711 (800-2)	NA

NE-3, 22 FEB 2024 to 21 MAR 2024
NE-3, 22 FEB 2024 to 21 MAR 2024