

APP CRS	Rwy Idg	4002
240°	TDZE	632
	Apt Elev	632


RNAV (GPS) RWY 24

HEBER SPRINGS MUNI (HBZ)


RNP APCH.

▼ NA	Procedure NA at night. Rwy 24 helicopter visibility reduction below 1 SM NA. Obtain local altimeter setting on CTAF; when not received, use Batesville altimeter setting and increase all MDAs 80 feet, and increase LNAV visibility Cat B ¼ SM, Cat C and D ½ SM. Increase Circling visibility Cat B, C ¼ SM, and Cat D ½ SM.	MISSED APPROACH: Climb to 4000 direct RILVE and hold, continue climb-in-hold to 4000.
--------------------------------------	--	---

MEMPHIS CENTER 126.85 281.55	UNICOM 122.7 (CTAF) 0
---------------------------------	--------------------------

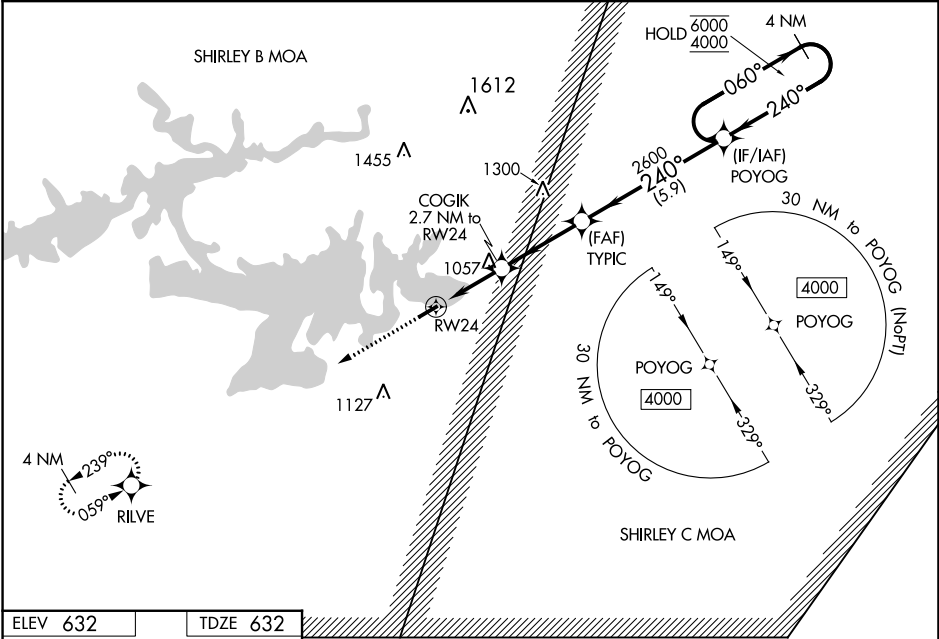

ELEV 632	TDZE 632
----------	----------

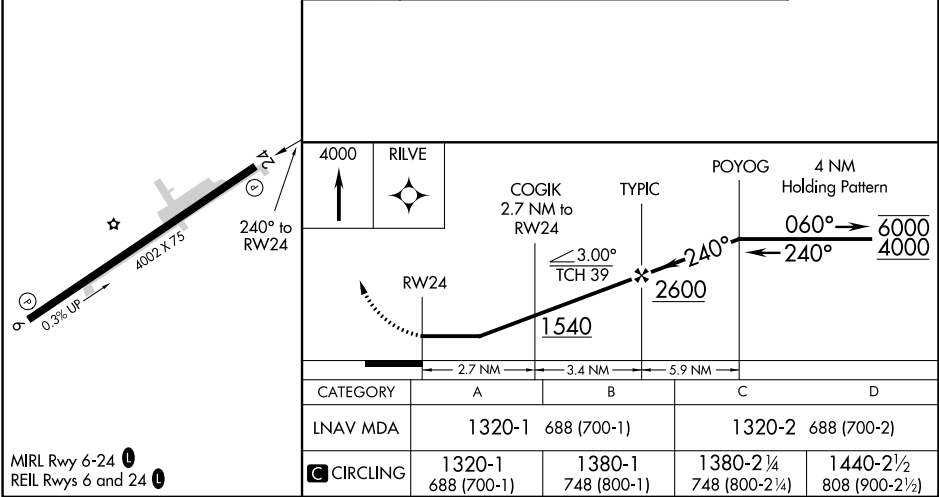

SC-1, 22 FEB 2024 to 21 MAR 2024

SC-1, 22 FEB 2024 to 21 MAR 2024


APP CRS	Rwy Idg	4002
060°	TDZE	631
	Apt Elev	632

RNAV (GPS) RWY 6


HEBER SPRINGS MUNI (HBZ)

RNP APCH.	Procedure NA at night. Rwy 6 helicopter visibility reduction below 1 SM NA. Obtain local altimeter setting on CTAF; when not received, use Batesville altimeter setting and increase all MDAs 80 feet, and increase LNAV visibility Cat C and D ¼ SM. Increase Circling visibility Cat C ¼ SM, Cat D ½ SM.	MISSED APPROACH: Climb to 4000 direct POYOG and hold, continue climb-in hold 4000.
-----------	--	--

MEMPHIS CENTER 126.85 281.55	UNICOM 122.7 (CTAF) 0
---------------------------------	--------------------------

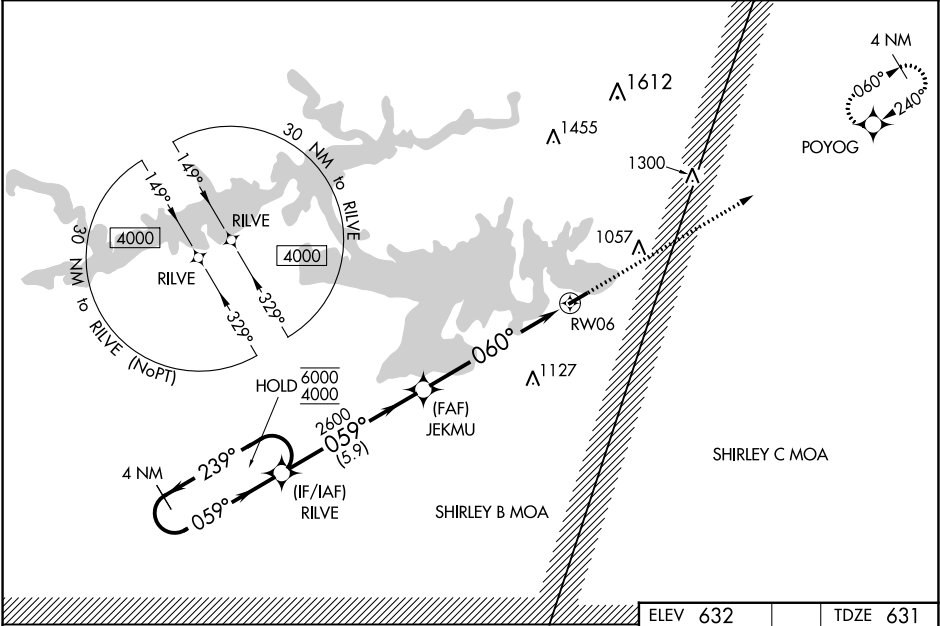

ELEV 632	TDZE 631
----------	----------

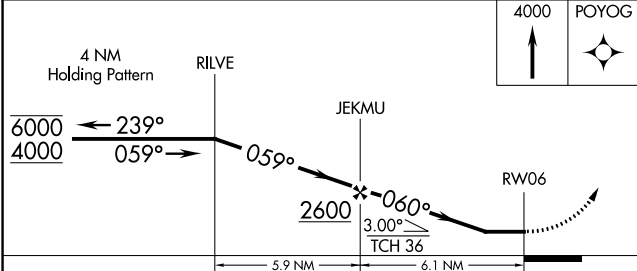

CATEGORY	A	B	C	D
LNAV MDA	1240-1	609 (700-1)	1240-1¾	609 (700-1¾)
CIRCLING	1240-1 608 (700-1)	1380-1 748 (800-1)	1380-2¼ 748 (800-2¼)	1440-2½ 808 (900-2½)

