
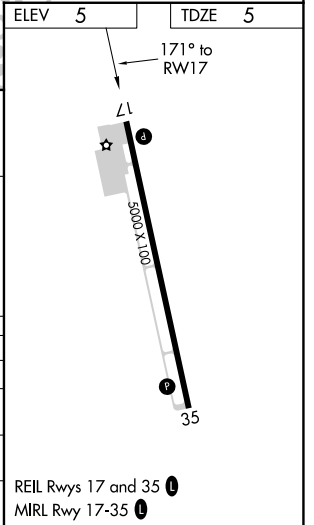
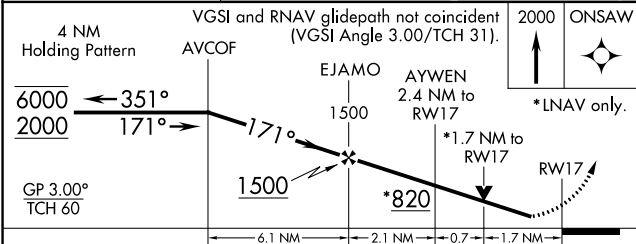



| | | |
|--|------------------------|---|
| WAAS CH 93516 W17A | APP CRS 171° | Rwy Idg 5000 TDZE 5 Apt Elev 5 |
|--|------------------------|---|

RNAV (GPS) RWY 17

MARCO ISLAND EXEC (MKY)

| | | | |
|---------------------------------|---|--------------------------|--|
| PBN APCH. | | | <p>MISSED APPROACH: Climb to 2000 direct ONSAW and hold.</p> |
| AWOS-3PT 120.075 | FORT MYERS APP CON * 124.125 371.85 | CLNC DEL 120.8 | |
| UNICOM 122.7 (CTAF) 0 | | | |

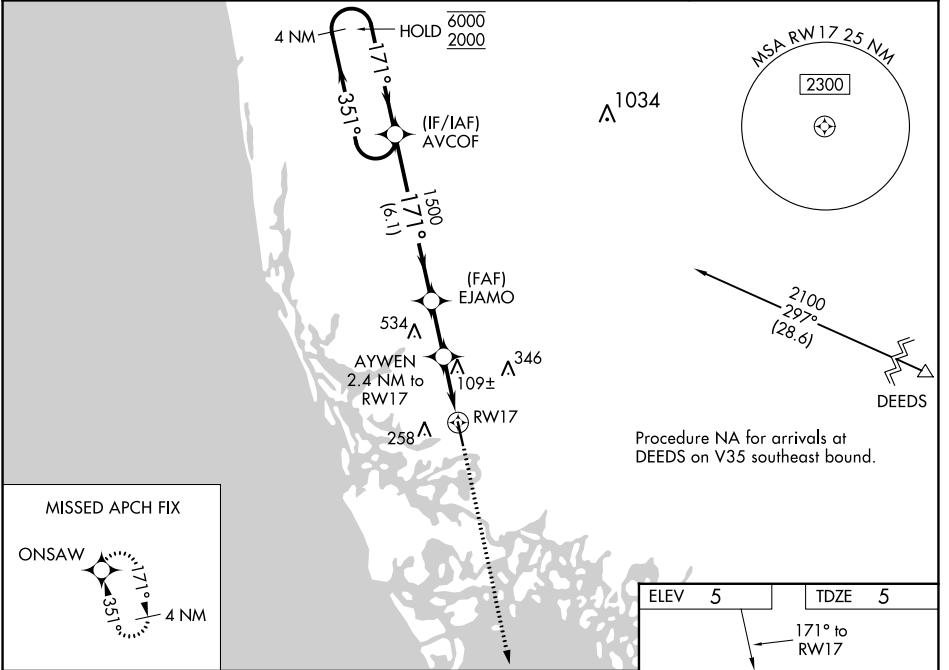

| | | | | |
|--------------|---------------------|-------------|------------------------|------------------------|
| CATEGORY | A | B | C | D |
| LPV DA | 300-1 295 (300-1) | | | |
| RNAV/VNAV DA | 458-1½ 453 (500-1½) | | | |
| RNAV MDA | 560-1 | 555 (600-1) | 560-1½ 555 (600-1½) | 560-1¾ 555 (600-1¾) |
| CIRCLING | 620-1 | 615 (700-1) | 660-1¾ 655 (700-1¾) | 840-2¾ 835 (900-2¾) |

SE-3, 22 FEB 2024 to 21 MAR 2024

SE-3, 22 FEB 2024 to 21 MAR 2024

| | | | |
|--|------------------------|-----------------------------|-------------------------------------|
| WAAS CH 53316 W35A | APP CRS 351° | Rwy Idg TDZE Apt Elev | 5000 5 5 |
|--|------------------------|-----------------------------|-------------------------------------|

RNAV (GPS) RWY 35


MARCO ISLAND EXEC (MKY)

PBN APCH.



▼ Baro-VNAV and VDP NA when using Naples altimeter setting. Rwy 35 helicopter visibility reduction below 3/4 SM NA. When local altimeter setting not received, use Naples altimeter setting and increase LPV DA to 312 feet; increase LNAV/VNAV DA to 420 feet; increase all MDAs 40 feet and visibility Cat C 1/4 SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 2°C or above 54°C.

MISSED APPROACH: Climb to 3000 direct AVCOF and hold, continue climb-in-hold to 3000.

| | | | |
|----------------------------|---|--------------------------|--|
| AWOS-3PT 120.075 | FORT MYERS APP CON * 124.125 371.85 | CLNC DEL 120.8 | UNICOM 122.7 (CTAF) 0 |
|----------------------------|---|--------------------------|--|

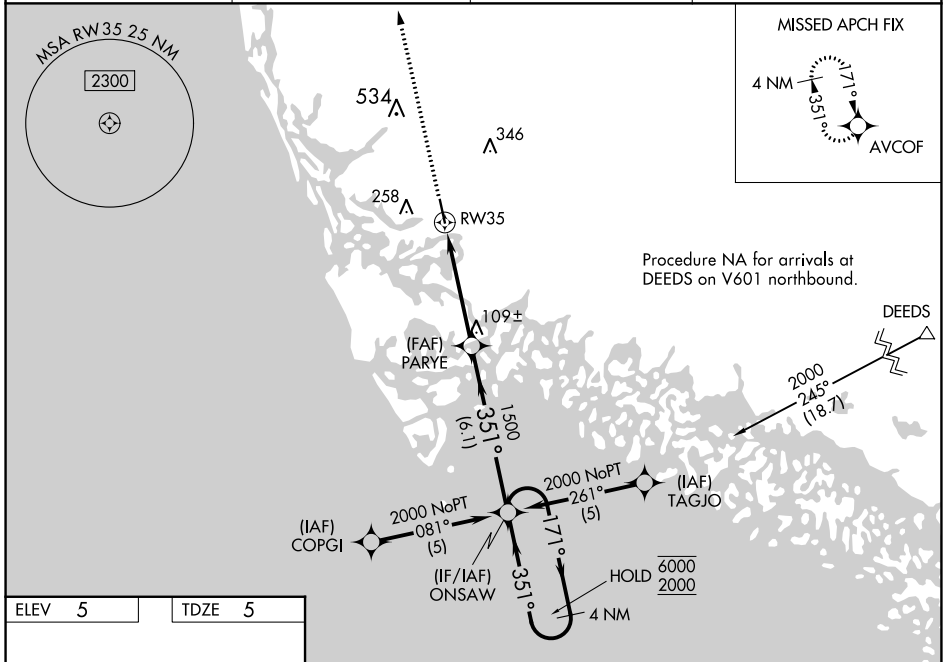

| | |
|--------|--------|
| ELEV 5 | TDZE 5 |
|--------|--------|

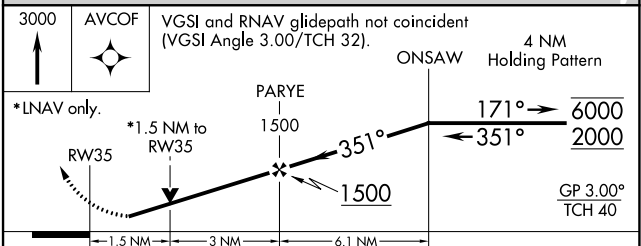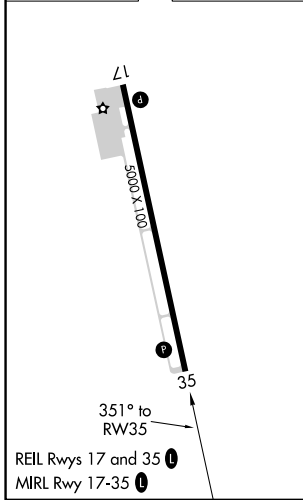

| CATEGORY | A | B | C | D |
|--------------|---------------------|---------------------|---------------------|---------------------|
| LPV DA | 286-1 281 (300-1) | | | |
| LNAV/VNAV DA | 394-1½ 389 (400-1½) | | | |
| LNAV MDA | 520-1 515 (600-1) | 520-1½ 515 (600-1½) | 520-1¾ 515 (600-1¾) | 520-1¾ 515 (600-1¾) |
| CIRCLING | 620-1 615 (700-1) | 660-1¾ 655 (700-1¾) | 840-2¾ 835 (900-2¾) | 840-2¾ 835 (900-2¾) |

SE-3, 22 FEB 2024 to 21 MAR 2024

SE-3, 22 FEB 2024 to 21 MAR 2024