


WAAS CH 72630 W11A	APP CRS 111°	Rwy Idg 5001 TDZE 1152 Apt Elev 1171
--	------------------------	---

RNAV (GPS) RWY 11
IOWA COUNTY (MRJ)

A Baro-VNAV NA when using Platteville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). When local altimeter setting not received, use Platteville altimeter setting and increase all DA 55 feet, increase LPV and LNAV/VNAV all Cats visibility ½ mile, increase all MDA 60 feet, and LNAV Cat C visibility ¼ mile. DME/DME RNP-0.3 NA.

MISSED APPROACH:
Climb to 3600 direct
YECNU and hold.

AWOS-3 118.525	CHICAGO CENTER 133.95 281.4	UNICOM 122.8 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

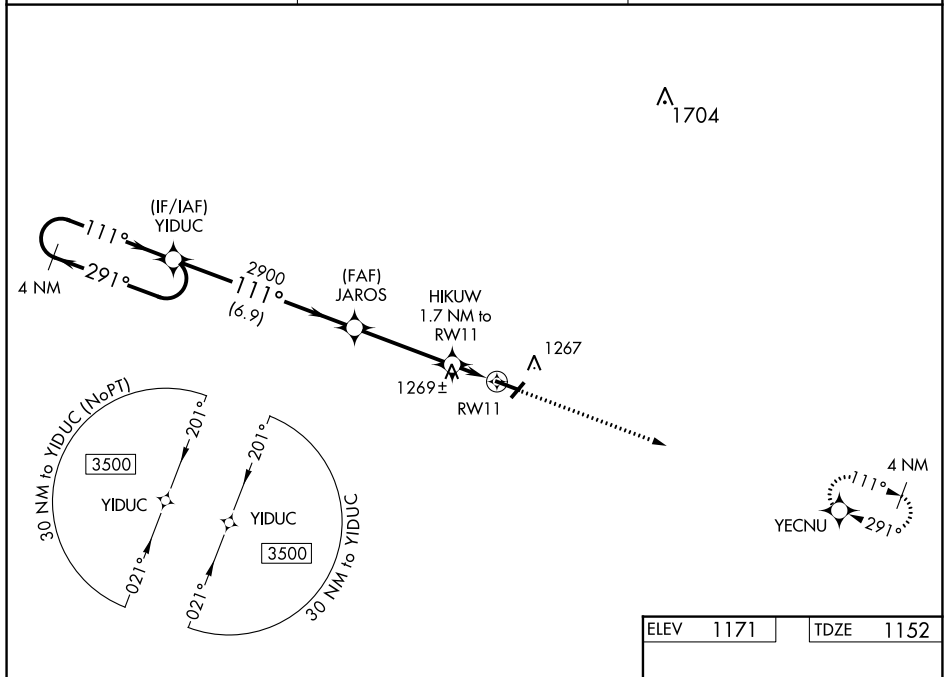

VGS1 and RNAV glidepath not coincident
(VGS1 Angle 3.00/TCH 43).

4 NM Holding Pattern

YIDUC

JAROS

HIKUW

3500

2900

1700

GP 3.00°
TCH 40

6.9 NM

3.7 NM

10.6 NM

3600

* LNAV only

CATEGORY	A	B	C	D
LPV DA	1352-¾ 200 (200-¾)			NA
LNAV/VNAV DA	1402-⅞ 250 (300-⅞)			NA
LNAV MDA	1520-1	368 (400-1)	1520-1⅛ 368 (400-1⅛)	NA
CIRCLING	1620-1 449 (500-1)	1640-1 469 (500-1)	1640-1½ 469 (500-1½)	NA

