

WAAS CH 42615 W15A	APP CRS 146°	Rwy Idg TDZE Apt Elev 4000 1025 1025
--	------------------------	--

RNAV (GPS) RWY 15

PLATTEVILLE MUNI (PVB)



▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Dubuque altimeter setting and increase LPV DA to 1331 feet; increase LNAV/VNAV DA to 1394 feet and all Cats visibilities ¼ SM; increase all MDAs 60 feet, increase LNAV and Circling Cat C visibility ¼ SM. Baro-VNAV and VDP NA when using Dubuque altimeter setting.

MISSED APPROACH:
Climb to 3000 direct ZAWDI and hold.

AWOS-3 120.575	CHICAGO CENTER 133.95 281.4	UNICOM 122.7 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

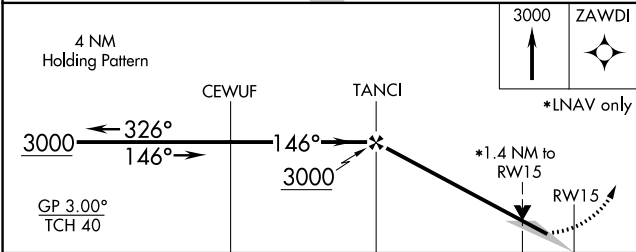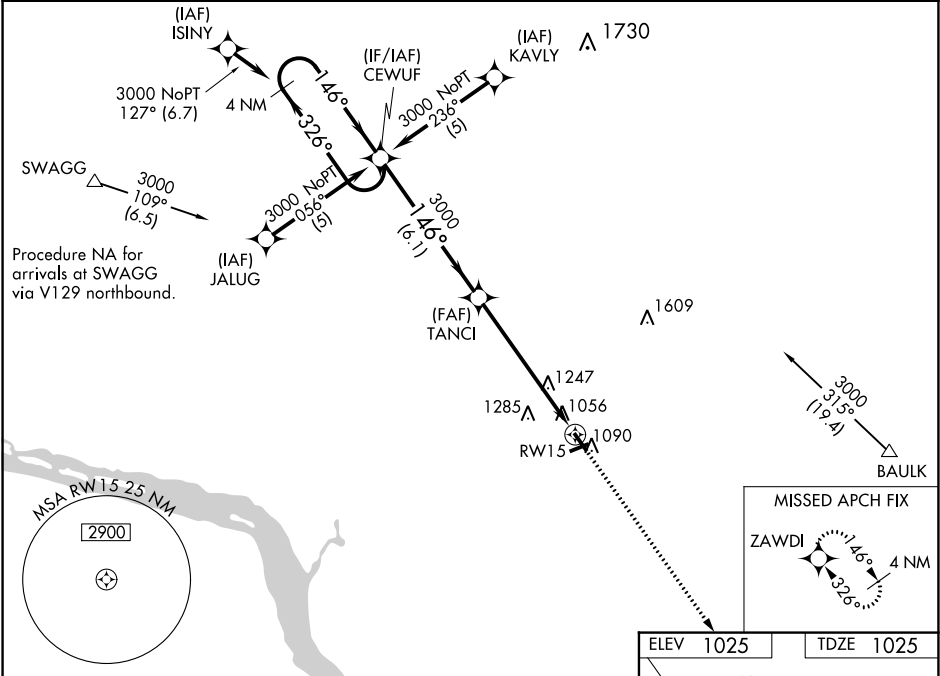

CATEGORY	A	B	C	D
LPV DA	1275-1	250 (300-1)		NA
LNAV/VNAV DA	1338-1	313 (400-1)		NA
LNAV MDA	1500-1	475 (500-1)	1500-1¼ 475 (500-1¼)	NA
CIRCLING	1500-1 475 (500-1)	1600-1 575 (600-1)	1600-1½ 575 (600-1½)	NA

