
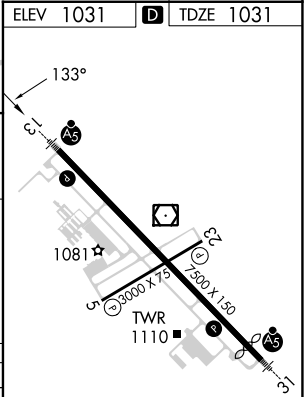
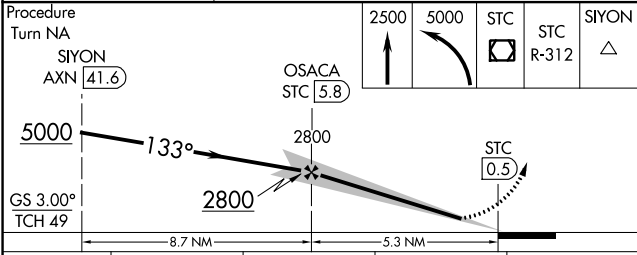



LOC I-BPM	APP CRS	Rwy Idg	7500
111.9	133°	TDZE	1031
		Apt Elev	1031

ILS or LOC/DME RWY 13
ST CLOUD RGNL (STC)

DME required.	MALSR	MISSED APPROACH: Climb to 2500 then climbing left turn to 5000 direct STC VOR/DME and via STC VOR/DME R-312 to SIYON/AXN VOR/DME 41.6 DME and hold.
▼ DME from STC VOR/DME. Simultaneous reception of I-BPM and STC DME required. ▲ When local altimeter setting not received, use Little Falls altimeter setting and increase DA to 1307 and all MDAs 80 feet. Increase S-LOC 13 Cats C/D and Circling Cats C/D visibility ¼ mile. For inoperative MALSR when using Little Falls altimeter setting, increase S-ILS 13 all Cats visibility ½ mile.	AS	

ATIS 119.375	MINNEAPOLIS CENTER 121.05 235.775	ST. CLOUD TOWER ★ 118.25 (CTAF) 0	GND CON 123.75
-----------------	--------------------------------------	--------------------------------------	-------------------

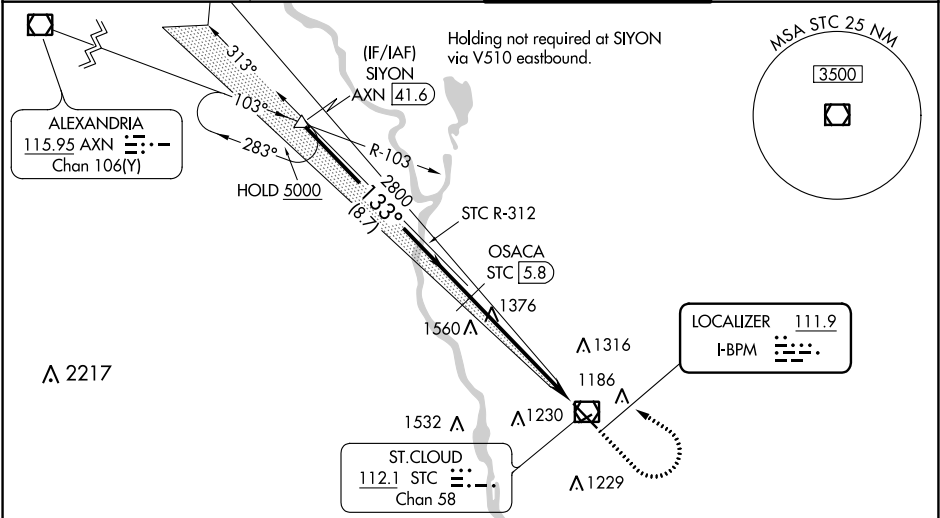

CATEGORY	A	B	C	D
S-ILS 13		1231-½	200 (200-½)	
S-LOC 13	1680-½	649 (700-½)	1680-1¼ 649 (700-1¼)	1680-1½ 649 (700-1½)
CIRCLING	1680-1	649 (700-1)	1680-1¾ 649 (700-1¾)	1860-2¾ 829 (900-2¾)

MIRL Rwy 5-23 0	HIRL Rwy 13-31 0
-----------------	------------------

NC-1, 22 FEB 2024 to 21 MAR 2024

NC-1, 22 FEB 2024 to 21 MAR 2024