

|            |         |          |      |
|------------|---------|----------|------|
| VORTAC TXK | APP CRS | Rwy Idg  | 4559 |
| 116.3      | 122°    | TDZE     | 388  |
| Chan 110   |         | Apt Elev | 390  |



VOR RWY 13

TEXARKANA RGNL-WEBB FLD (TXK)

**⚠** When local altimeter setting not received, use De Queen altimeter setting and increase all MDA 100 feet, increase S-13 and Cat C and D visibility ¼ SM, and Circling Cat C and D visibility ¼ SM. Visibility reduction by helicopters NA. VDP NA when using De Queen altimeter setting.

**MISSED APPROACH:** Climb to 1500 then climbing right turn to 2000 direct TXK VORTAC and hold.

|               |                                      |                                               |                    |
|---------------|--------------------------------------|-----------------------------------------------|--------------------|
| ATIS<br>120.2 | FORT WORTH CENTER<br>123.925 269.475 | TEXARKANA TOWER ★<br>123.875 (CTAF) 0 235.625 | GND CON<br>119.225 |
|---------------|--------------------------------------|-----------------------------------------------|--------------------|

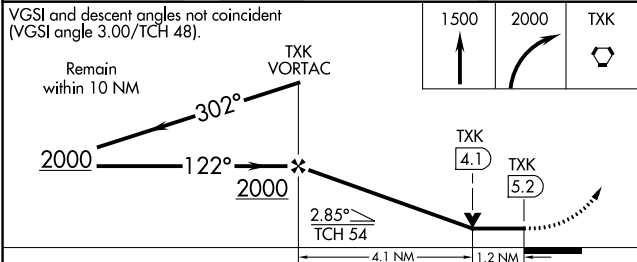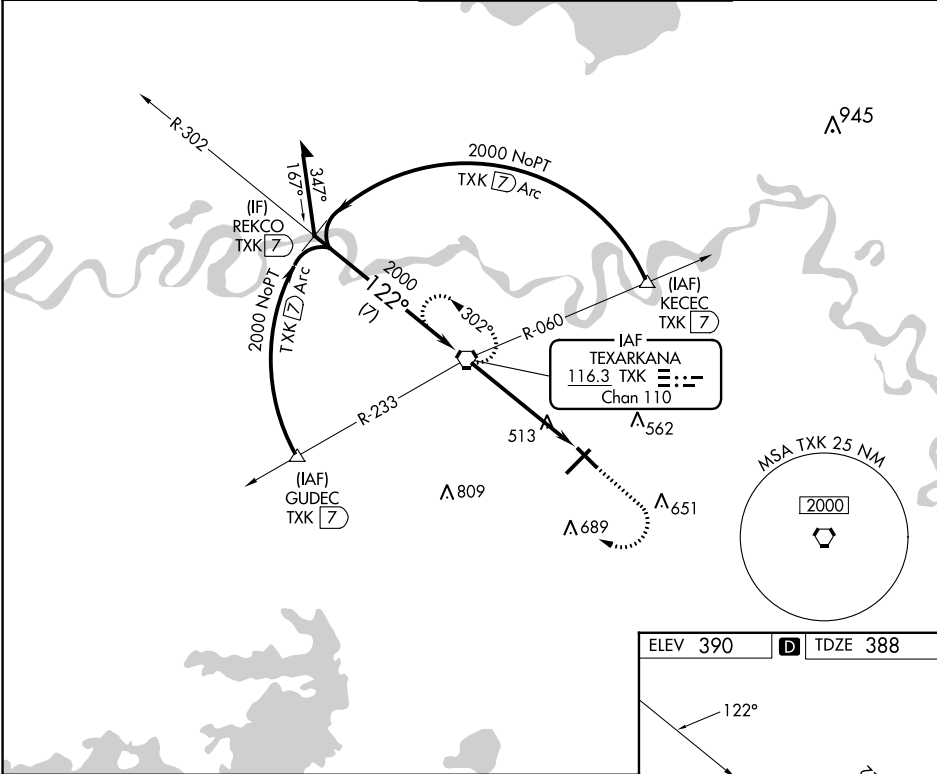

|                   |                          |
|-------------------|--------------------------|
| ELEV 390          | TDZE 388                 |
|                   |                          |
| MIRL Rwy 13-31    |                          |
| MIRL Rwy 4-22     |                          |
| FAF to MAP 5.2 NM |                          |
| Knots             | 60 90 120 150 180        |
| Min:Sec           | 5:12 3:28 2:36 2:05 1:44 |

| CATEGORY | A                 | B                 | C                  | D                  |
|----------|-------------------|-------------------|--------------------|--------------------|
| S-13     | 780-1 392 (400-1) | 780-1 392 (400-1) | 780-1 392 (400-1)  | 780-1 392 (400-1)  |
| CIRCLING | 820-1 430 (500-1) | 900-1 510 (600-1) | 1000-1 610 (700-1) | 1080-2 690 (700-2) |